

SÓLAS

CONTEMPORARY FIRE

SÓLAS

TRANSFORM ANY ROOM IN YOUR
HOUSE WITH EASE, WITH ONE OF OUR
CONTEMPORARY WALL MOUNTED,
DIRECT VENT GAS FIREPLACES.
DEVELOPED WITH TODAY'S DISCERNING
HOMEOWNER IN MIND, AND OFFERING
A UNIQUE ALTERNATIVE TO THE
TRADITIONAL "LOG FIRE" STOVES &
FIREPLACES.



WHY SÓLAS?

CONTEMPORARY DESIGN

The SÓLAS line of highly efficient contemporary fireplaces offer all of the features in demand by today's most discerning, design conscious homeowner.

EASE OF INSTALLATION

The SÓLAS line of wall mount fireplaces allows for installation throughout the home, without the need for major renovations. Simply hang on the wall and vent to the outside, to add a dramatic focal point to any room.

INSTALLATION FLEXIBILITY

SÓLAS Fireplaces require minimal clearances to combustibles and take up very little space in a room. The fireplaces can be located as low as 3" from the floor or positioned perfectly to "couch height". Overall depth is just 7%".

SIMPLE OPERATION

SÓLAS Fireplaces can be operated manually, or THERMOSTATICALLY using the hand held REMOTE CONTROL (standard). An optional wall switch is also available for manual operation. Flame height can be raised or lowered to achieve desired effect.

FUEL SPECIFIC / LP OR NG

SÓLAS Fireplaces are ordered fuel specific, LP or NG. This ensures that every unit is fully tested at the factory for use with your specific gas type.

SAFETY STANDARDS

All SÓLAS products come with an inconspicuous modern-mesh screen in compliance with the latest safety standards.

PORCELAIN ENAMEL

SÓLAS Fireplaces provide amazing radiant heat using the combination of reflective glass media and porcelain enamel panels. The panels provide reflective radiant heat, in addition to several layers of fire light—all of which enhance the soothing dancing flames.

REFLECTIVE GLASS MEDIA **BURNER PAN**

Reflective glass media is used specifically for SÓLAS Fireplaces—ensuring they will operate with the highest efficiency possible. Glass crystals on top of the burner cast light throughout the fireplace and surrounding areas. Black and clear glass media as standard; colored glass media optional.

BATTERY OPERATION

SÓLAS Fireplaces operate using a Mertik Maxitrol® control system which runs on 4 AA batteries, so there is no need to hard wire power to the fireplace, and, in a power outage you still have heat. Normal battery life is one heating season.

A VARIETY OF CONTEMPORARY MODELS TO CHOOSE FROM:

With a full range of models to choose from, the SÓLAS can satisfy any heating requirement, and room size.

FORTY6

Linear Wall Mount Direct Vent Gas Fireplace



TWENTY6

Landscape Wall Mount Direct Vent Gas Fireplace



ONE₆

Portrait Wall Mount Direct Vent Gas Fireplace



TWENTY6 FI

Direct Vent Gas Fireplace Insert



ONE6 FS

Freestanding Direct Vent Gas Stove







FORTY6 LINEAR WALL MOUNT DIRECT VENT GAS FIREPLACE

The SÓLAS FORTY6 is a linear wall mount, direct vent, gas fireplace. Not a built-in, the SÓLAS FORTY6 features a unique wall mount design allowing for installation throughout the home, without the need for major renovations. Simply hang on the wall to add a dramatic focal point to any room. The SÓLAS FORTY6 is a highly efficient contemporary fireplace offering all of the features in demand by today's most discerning, design conscious homeowner. Despite its sleek profile, the unit's reflective porcelain enamel firebox serves to reflect the flames, adding depth to the flame picture, for a very dramatic effect. As standard, the fireplace comes with a state of the art remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically controlling your desired room temperature.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- Automatic Pilot Ignition
- 5 Interchangeable Surround Options
- Reflective Porcelain Enamel Liners
- Programmable Thermostatic Remote Control, Standard
- · Modern-Mesh Safety Screen

SPECIFICATIONS

В	TU Rate Range (NG)	29,000 - 19,000/hr
В	TU Rate Range (LP)	29,000 - 19,000/hr
G	lass Viewing Area	46" W
D	imensions	58%" W x 25¼" H x 8" D
M	laximum Observed Steady State Efficiency	78.5% / 79.0%
R	emote Control	Standard
V	enting	20' Vertical & 10' Horizonta

CLEARANCE

Fireplace to Side Walls	6
Fireplace to Corner	6
Fireplace to Ceiling	8
Fireplace to Floor	3



High Gloss Black



Stainless Steel



Combination Stainless Steel & Satin Black



Steel Grey



Satin Black

TWENTY6 | LANDSCAPE WALL MOUNT DIRECT VENT GAS FIREPLACE

A new concept in fireplaces, the SÓLAS TWENTY6 is a revolutionary wall mount, direct vent, gas fireplace. Simply hang the unit on an outside wall and direct vent for a simple, effortless, installation. On an inside wall, the fireplace can be installed with venting runs of up to 20ft vertical and 10ft horizontal, allowing for a wide range of installation options throughout your home. The SÓLAS TWENTY6 is a 38¾" wide, 19,000 BTU "landscape" format unit designed for larger room settings. This contemporary model is heater rated and offers a spectacular flame picture which is enhanced by the reflective porcelain enamel firebox liners. The SÓLAS TWENTY6 offers today's discerning consumer designer styling with a wide range of surround colors and options available. Surrounds can be changed in a matter of seconds, without the use of tools. So, if you decide to change your room's decor the fireplace can be updated quickly and inexpensively to complement the new look of your room. The SÓLAS TWENTY6 also has an optional Corner Mounting Kit available, allowing the heater to be mounted directly into a corner, saving space, and, creating a unique focal point in your room.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- 5 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Programmable Thermostatic Remote Control, Standard
- Optional Corner Installation Kit Available
- Modern-Mesh Safety Screen

SPECIFICATIONS

BTU Rate Range (NG)	19,000 - 11,000/hr
BTU Rate Range (LP)	19,000 - 11,000/hr
Glass Viewing Area	26" W
Dimensions	38¾" W x 27¼" H x 7%" D
Maximum Observed Steady State Efficiency	78.8% / 79.5%
Remote Control	Standard
Venting	20' Vertical & 10' Horizonta

CLEARANCE

Fireplace to Side Walls	6
Fireplace to Corner	6
Fireplace to Ceiling	8
Fireplace to Floor	3



High Gloss Black



Stainless Steel



Combination Stainless Steel & Satin Black



Steel Grey



Satin Black





ONE 6 | PORTRAIT WALL MOUNT DIRECT VENT GAS FIREPLACE

The SÓLAS ONE6 brings you the same contemporary style as the SÓLAS TWENTY6, but in a portrait format. Simply hang the unit on an outside wall and direct vent for a simple, effortless, installation. On an inside wall, the fireplace can be installed with venting runs of up to 20' vertical and 10' horizontal, allowing for a wide range of installation options throughout your home. The SÓLAS ONE6 is a 23½" wide, 13,500 BTU "portrait" format unit designed for smaller room settings. This contemporary model is heater rated and offers a spectacular flame picture which is enhanced by the reflective porcelain enamel firebox liners. The unit offers today's discerning consumer designer styling with a wide range of surround colors and options available. Surrounds can be changed in a matter of seconds, without the use of tools. So, if you decide to change your room's decor the fireplace can be updated quickly and inexpensively to complement the new look of your room. The SÓLAS ONE6 also has an optional Corner Mounting Kit available, allowing the heater to be mounted directly into a corner, saving space, and, creating a unique focal point in your rooms.

FEATURES

- Wall Mounted
- Ease of Installation, Simply Hangs on the Wall
- · Direct Vent Technology, Heater Rated
- Natural Gas or Propane
- 5 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Programmable Thermostatic Remote Control, Standard
- Optional Corner Installation Kit Available
- Modern-Mesh Safety Screen

SPECIFICATIONS

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Glass Viewing Area	16" W
Dimensions	23½" W x 30" H x 75%" D
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Remote Control	Standard
Venting	20' Vertical & 10' Horizonta

CLEARANCE

Fireplace to Side Walls	6'
Fireplace to Corner	6'
Fireplace to Ceiling	8'
Firenlace to Floor	21



High Gloss Black



Stainless Steel



Combination Stainless Steel & Satin Black



Steel Grey



Satin Black

TWENTY6 FI | DIRECT VENT GAS FIREPLACE INSERT

The SÓLAS TWENTY6 FI is a uniquely contemporary fireplace insert which offers consumers the option of upgrading their existing masonry or factory built wood-burning fireplace to a high efficiency direct vent gas heater with clean modern lines. The unit is designed to maximize the fire view across its 26" wide burner, with the flame picture being further enhanced by the reflective porcelain enamel firebox liners. The SÓLAS TWENTY6 FI is compact in size fitting even the smallest factory built units, using a standard 2 x 3" aluminum reline kit for venting. It comes standard with a variable speed convection blower and a programmable thermostatic remote control.

FEATURES

- High Efficient, Gas Fireplace Insert
- Natural Gas or Propane
- Three Surround Options
- Reflective Porcelain Enamel Liner
- Programmable Thermostatic Remote Control, Standard
- Modern-Mesh Safety Screen

SPECIFICATIONS

BTU Rate Range (NG)	19,500 - 11,500/hr
BTU Rate Range (LP)	19,500 - 11,500/hr
Glass Viewing Area	26" W x 10½" H
Dimensions	29¾" W x 20¾" H x 14¼" D
Maximum Observed Steady State Efficiency	79.0% / 80.0%
Minimum Fireplace Opening	14¼" D
Variable Speed Blower	Standard
Remote Control	Standard
Venting	2 x 3" Liners, 36' Maximum

SURROUND SIZES

Standard Surround Size	38" W x 26" H
Optional Surround Sizes	40" W x 25" H
	40" W x 29" H
	11" W v 32" H



/ the last a



Combo Satin Black & Stainless Steel

Combo Satin Black & Steel Grey





ONE6 FS | FREESTANDING DIRECT VENT GAS STOVE

The SÓLAS ONE6 FS is a contemporary freestanding, direct vent gas stove with clean lines and elegant proportions. The unit is designed to maximize the fire view from the 13,500 BTU burner, with the flame picture being enhanced by the reflective porcelain enamel firebox liners. The SÓLAS ONE6 FS can be set up for top or rear venting, and can be direct vented (without any vertical rise) using 4 x 6%" coaxial pipe. A programmable thermostatic remote control is supplied as standard, and allows for either manual operation or, can be programmed to maintain your room temperature at a set comfort level. An optional variable speed blower is also available.

FEATURES

- High Efficiency, Direct Vent Gas Stove
- Natural Gas or Propane
- Three Color Options
- Reflective Porcelain Firebox Liners
- Programmable Thermostatic Remote Control, Standard
- Modern-Mesh Safety Screen

SPECIFICATIONS

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Glass Viewing Area	16" W
Dimensions	231/8" W x 187/8" D x 403/4" H
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Variable Speed Convection Blower	Optional
Remote Control	Standard
Venting	Top or Rear Vent up to 20'

SURROUND OPTIONS



Satin Black



Combo Satin Black & Steel Grey



Vertical & 10' Horizontal

Steel Grey


SPECIFICATION MATRIX

				1	
Specifications	FORTY6	TWENTY6	ONE6	TWENTY6 FI	ONE6 FS
BTU Rate Range (NG)	29,000 - 19,000/hr	19,000 - 11,000/hr	13,500 - 7,500/hr	19,500 - 11,500/hr	13,500 - 7,500/hr
BTU Rate Range (LP)	29,000 - 19,000/hr	19,000 - 11,000/hr	13,500 - 7,500/hr	19,500 - 11,500/hr	13,500 - 7,500/hr
Glass Viewing Area	46" W x 12" H	26" W x 14½" H	16" W x 18" H	26" W x 10½" H	16" W x 18" H
Dimensions	58%" W x 25¼" H x 8" D	38¾" W x 27¼" H x 75%" D	23½" W x 30" H x 7%" D	29¾" W x 20¾" H x 14¼" D	231/8" W x 187/8" D x 403/4" H
Clearance to Combustibles (Side / Corner)	6" / 6"	6" / 6"	6" / 6"	4.5"	1" / 1"
Clearance to Combustibles (Ceiling / Floor)	8" / 3"	8"/3"	8" / 3"	35" Floor to Mantel	19" / n/a
Maximum Observed Steady State Efficiency (NG / LP)	78.5% / 79.0%	78.8% / 79.5%	79.0% / 77.8%	79.0% / 80.0%	79.0% / 77.8%
Weight	155 lbs	130 lbs	105 lbs	135 lbs	175 lbs
Remote Control (Standard)	Programmable Thermostatic Remote Control				
Electric	Not Required	Not Required	Not Required	110V for Blower Only	110V for Optional Blower
Blower	n/a	n/a	n/a	Variable Speed Blower	Optional
Venting	20' Vertical & 10' Horizontal	20' Vertical & 10' Horizontal	20' Vertical & 10' Horizontal	2 x 3" Liners, 36' Maximum	Top or Rear Vent up to 20' Vertical & 10' Horizontal
Media	Clear / Black Reflective Glass Crystals				
Optional Glass Media Upgrade	Aureo (Reflective), Cerulean, Cyprium, Jade, La Mer, Sapphire (Reflective)				
Safety Screen	Standard	Standard	Standard	n/a	n/a
Options	Optional Manual Wall Switch	Optional Manual Wall Switch Optional Corner Installation Kit	Optional Manual Wall Switch Optional Corner Installation Kit	Surround Std: 38" W x 26" H Surround Med: 40" W x 29" H Surround Large: 44" W x 32" H	Top or Rear Vent
Surround Options	Satin Black, Steel Grey, High Gloss Black, Stainless Steel, Combina- tion (Stainless Steel & Satin Black)	Satin Black, Steel Grey, High Gloss Black, Stainless Steel, Combina- tion (Stainless Steel & Satin Black)	Satin Black, Steel Grey, High Gloss Black, Stainless Steel, Combina- tion (Stainless Steel & Satin Black)	Satin Black, Combination Satin Black & Stainless Steel, Combina- tion Satin Black & Steel Grey	Satin Black, Combination Satin Black & Steel Grey
Certification	Certified by OMNI-Test Laboratories, Inc. to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/ CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09	Certified by OMNI-Test Laboratories, Inc. to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/ CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09	Certified by OMNI-Test Laboratories, Inc. to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/ CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09	Certified by OMNI-Test Laboratories, Inc. to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/ CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09	Certified by OMNI-Test Laboratories, Inc. to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/ CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09







FORTY6

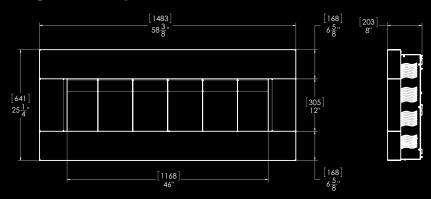


TWENTY6

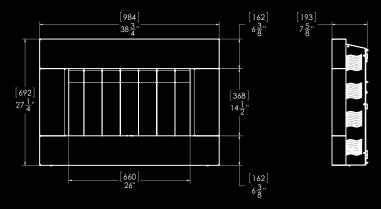



ONE6




TWENTY6 FI








ONE6 FS







4 TECHNOLOGY DRIVE WEST LEBANON, NH 03784

P: (603) 298-5169 F: (603) 298-9246

A Division of Progressive Manufacturing Inc.

