



VENT-FREE GAS FIREPLACES

SÓLAS
CONTEMPORARY FIRE

The Home of Contemporary Fire

Transform your home or office with one of our contemporary wall-mount, Vent-Free gas fireplaces. Because venting is not required, you can install a fireplace at any height on interior or exterior walls. With three models to choose from, SÓLAS Vent-Free wall-mount fireplaces are the simplest solution to providing supplemental zone heating anywhere in your home.

Proudly Designed and Built in the USA



Why SÓLAS Vent-Free

SÓLAS Vent-Free gas wall-mount fireplaces can be installed practically anywhere. Because venting is not required, the product's unique wall-mount design allows you the freedom to install a fireplace on any internal or external wall without the need for major renovations. SÓLAS Vent-Free state-of-the-art designs are a simple solution to bring warmth and ambiance to your home or office.

Contemporary Design

The SÓLAS line of highly efficient contemporary fireplaces offers all of the features in demand by today's most discerning, design conscious homeowner.

Simple Operation

SÓLAS Fireplaces can be operated manually or thermostatically using the hand-held remote control (standard). An optional wall switch is also available for manual operation. Flame height can be raised or lowered to achieve the desired effect.

Porcelain Enamel

SÓLAS Fireplaces provide amazing radiant heat by combining reflective glass media and porcelain enamel panels. The panels provide reflective radiant heat in addition to several layers of fire light—all of which enhance the soothing dancing flames.

Made With Pride In The USA

SÓLAS products are designed and manufactured at our facility in New Hampshire, USA.

Ease of Installation

No venting required. Simply hang the unit on the wall for a simple, low-cost, effortless installation. No major renovations needed for existing construction. Ideal for new construction.

Fuel Specific / LP or NG

SÓLAS Fireplaces are ordered fuel specific, LP or NG. This ensures that every unit is fully tested at the factory for use with your specific gas type.

Reflective Glass Media Burner Pan

Reflective glass media is used in SÓLAS fireplaces—ensuring they will operate with the highest efficiency possible. Glass crystals on top of the burner cast light throughout the fireplace and surrounding areas. Black glass media is standard; clear and colored glass media is optional.

Installation Flexibility

SÓLAS Fireplaces have been approved to mount directly on combustible surfaces. The fireplaces can be located as low as 3" from the floor or positioned perfectly to "couch height." Overall depth is less than 8".

Safety Standards

SÓLAS Vent-Free fireplaces are certified to the latest national safety standards (ANSI Z21.11.2-2013) and are built with an ODS Safety Pilot. For added-safety, our vent-free units are supplied with a modern-mesh safety screen as standard.

Battery Operation

SÓLAS Fireplaces operate using a Mertik Maxitrol control system, which runs on 4 AA batteries, so there is no need to hard wire power to the fireplace; and in a power outage, you still have heat. Normal battery life is one heating season.



FORTY6 VF

LINEAR WALL-MOUNT VENT-FREE GAS FIREPLACE

The SÓLAS FORTY6 VF with its chic linear design makes a statement in any setting. The architecturally striking FORTY6 VF is commonly used as an efficient supplemental heat source in larger rooms, foyers, and lobbies. The FORTY6 VF has no requirement for non-combustible materials, specialized construction, framing, or venting, allowing for quick and easy mounting on interior or exterior walls—in new or existing construction. With six interchangeable surround options available, the FORTY6 VF allows home owners to add a dramatic focal point to their interior designs. A state-of-the-art programmable thermostatic remote control and a safety screen come as standard.

Features

- Wall-Mounted
- Ease of Installation, Simply Hangs on the Wall
- Natural Gas or Propane
- 6 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Reflective Porcelain Enamel Liners
- Programmable Thermostatic Remote Control, Standard
- Modern-Mesh Safety Screen

Specifications

BTU Rate Range (NG) 37,000 - 23,000/hr
BTU Rate Range (LP) 37,000 - 25,000/hr
Viewing Area 46" (1168mm) W x 12" (305mm) H
Dimensions 58³/₈" (1483mm) W x 25¹/₄" (641mm) H
x 8" (203mm) D
Efficiency Up to 99%
Remote Control Standard

Clearance

Fireplace to Side Walls ... 6" (152mm)
Fireplace to Corner 6" (152mm)
Fireplace to Ceiling 12" (305mm)
Fireplace to Floor 3" (76mm)

Surround Options



Stainless Steel



Stainless Steel and Satin Black Combination



Stainless Steel and Steel Grey Combination



Steel Grey



Satin Black



Pure White

TWENTY6 VF

LANDSCAPE WALL-MOUNT VENT-FREE GAS FIREPLACE

The SÓLAS TWENTY6 VF is a versatile wall-mount “landscape” design fireplace that can be placed in almost any room in a variety of home and commercial settings. The TWENTY6 VF is also an ideal model for homeowners who want to add supplemental zone heating at “couch height.” The TWENTY6 VF is the answer for an easy and flexible fireplace installation, with no requirement for non-combustible materials, specialized construction, framing, or venting. With six interchangeable surround options available, this widely popular model is the perfect choice in both modern and traditional interiors. A state-of-the-art programmable thermostatic remote control and a safety screen come as standard. Optional Corner Mounting Kit available.

Features

- Wall-Mounted
- Ease of Installation, Simply Hangs on the Wall
- Natural Gas or Propane
- 6 Interchangeable Surround Options
- Automatic Pilot Ignition
- Automatic Hi/Lo Flame Height Adjustment
- Programmable Thermostatic Remote Control, Standard
- Optional Corner Installation Kit Available
- Modern-Mesh Safety Screen

Specifications

BTU Rate Range (NG) ...	26,000 - 16,000/hr
BTU Rate Range (LP)	30,000 - 19,000/hr
Viewing Area	26" (660mm) W x 14½" (368mm) H
Dimensions	38¾" (984mm) W x 27¼" (692mm) H
	x 7⅝" (194mm) D
Efficiency	Up to 99%
Remote Control	Standard

Clearance

Fireplace to Side Walls ...	6" (152mm)
Fireplace to Corner	6" (152mm)
Fireplace to Ceiling	12" (305mm)
Fireplace to Floor	3" (76mm)

Surround Options



Stainless Steel



Stainless Steel and Satin Black Combination



Stainless Steel and Steel Grey Combination



Steel Grey



Satin Black



Pure White



ONE6 VF, SHOWN WITH PURE WHITE SURROUND






PORTRAIT WALL-MOUNT VENT-FREE GAS FIREPLACE

Features

- ## Specifications

Clearance

Surround Options



Specification Matrix


SPECIFICATIONS	FORTY ⁶ VF	TWENTY ⁶ VF	ONE ⁶ VF
BTU Rate Range (NG)	37,000 - 23,000/hr	26,000 - 16,000/hr	16,000 - 12,500/hr
BTU Rate Range (LP)	37,000 - 25,000/hr	30,000 - 19,000/hr	18,000 - 11,000/hr
Glass Viewing Area	46" (1168mm) W x 12" (305mm) H	26" (660mm) W x 14½" (368mm) H	16" (406mm) W x 18" (457mm) H
Dimensions	58¾" (1483mm) W x 25¼" (641mm) H x 8" (203mm) D	38¾" (984mm) W x 27¼" (692mm) H x 7⅝" (194mm) D	23½" (597mm) W x 30" (762mm) H x 7⅝" (194mm) D
Clearance to Combustibles (Side / Corner)	6" (152mm) / 6" (152mm)	6" (152mm) / 6" (152mm)	6" (152mm) / 6" (152mm)
Clearance to Combustibles (Ceiling / Floor)	12" (305mm) / 3" (76mm)	12" (305mm) / 3" (76mm)	12" (305mm) / 3" (76mm)
Efficiency	Up to 99%	Up to 99%	Up to 99%
Weight	155 lbs (70.5 kgs)	130 lbs (59.1 kgs)	105 lbs (47.7 kgs)
Remote Control (Standard)	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control	Programmable Thermostatic Remote Control
Electric	Battery Operated with A/C Adapter Optional	Battery Operated with A/C Adapter Optional	Battery Operated with A/C Adapter Optional
Media	Black Reflective Glass Crystals	Black Reflective Glass Crystals	Black Reflective Glass Crystals
Optional Glass Media Upgrade	Aureo (Reflective), Cerulean, Cyprium, Jade, La Mer, Sapphire (Reflective), Black/Clear (Mixed)		
Safety Screen	Standard	Standard	Standard
Options	Optional Manual Wall Switch	Optional Manual Wall Switch Optional Corner Installation Kit	Optional Manual Wall Switch Optional Corner Installation Kit
Surround Options	Stainless Steel, Stainless Steel and Satin Black Combination, Stainless Steel and Steel Grey Combination, Satin Black, Steel Grey, Pure White		
Certification	Tested and Listed to ANSI Z21.1.2-2013 by PFS•TECO		
Warranty	Limited Lifetime Warranty, full details available at solasfires.com/warranty		

Check the local/state codes to determine if unvented heaters are permitted at your location before installing these products. Some jurisdictions do not permit the installation of Vent-Free appliances. Consult your dealer/installer to confirm that the appliance is properly sized for the room in which it will be installed, to ensure adequate combustion and ventilation air. Intended use is as a supplemental zone heating source.


Disclaimer: The images seen in this catalog may appear to depict inaccuracies from the required clearances to combustibles. All clearances as outlined in this specification matrix must be maintained. Please refer to the installation manual for complete installation requirements.

Dimensional Drawing


FORTY6 VF

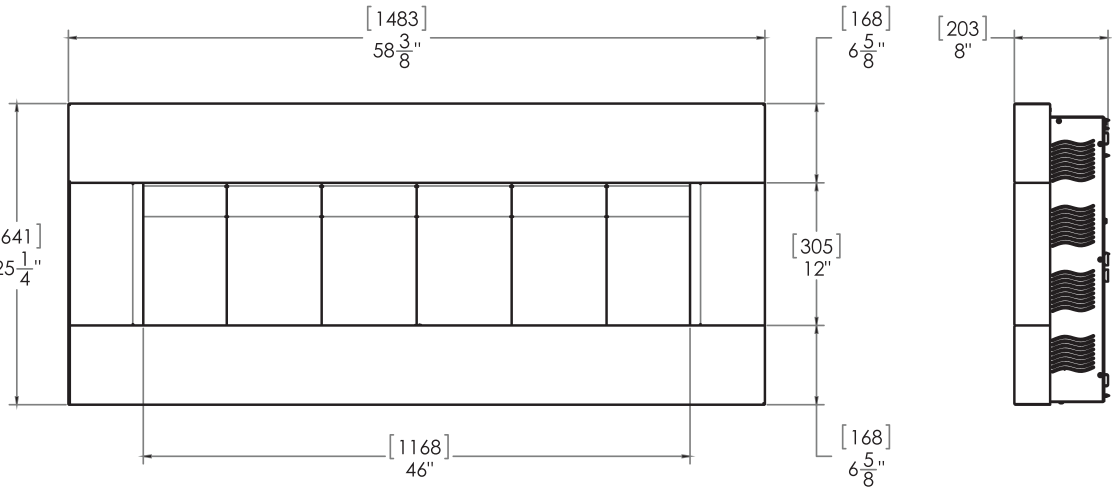

TWENTY6 VF

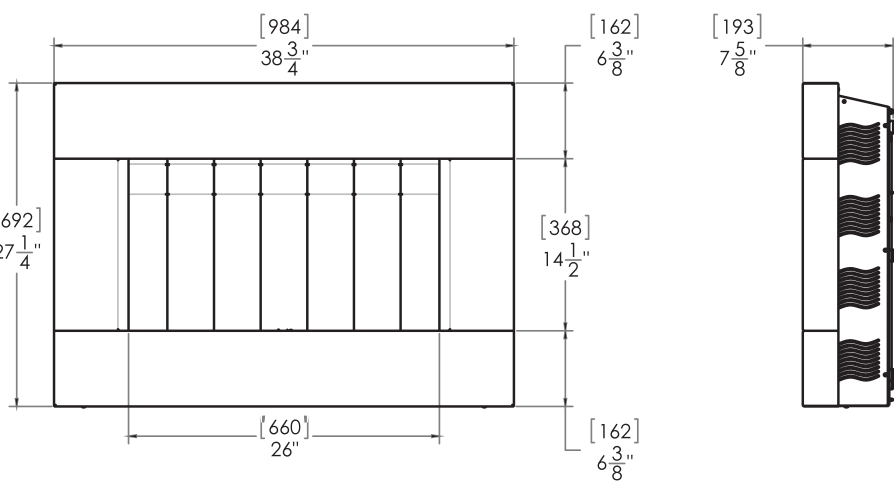

ONE6 VF

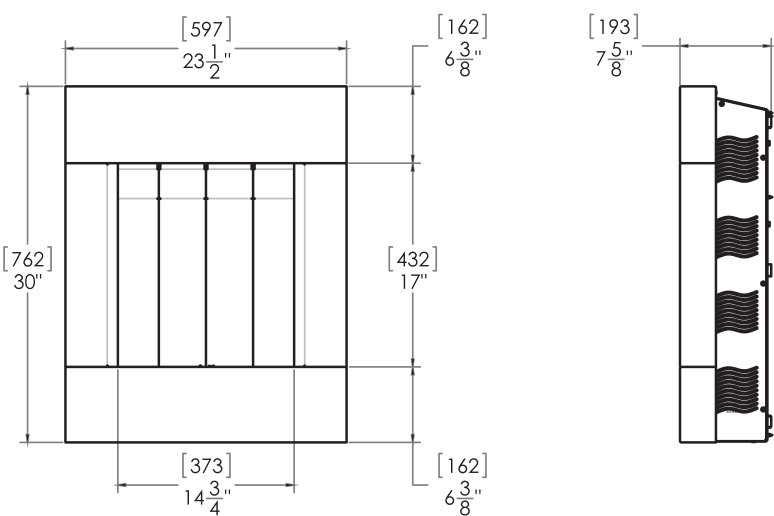

SÓLAS

CONTEMPORARY FIRE

452 SUNAPEE STREET
NEWPORT, NH 03773

P (603) 298-5169
F (603) 298-9246

A Division of Progressive Manufacturing Inc.

See the full line of SÓLAS products at solasfires.com



PROUDLY DESIGNED AND BUILT IN THE USA
Product specifications subject to change without notice

Cover: **FORTY6 VF**, shown with Stainless Steel and Satin Black Combination surround