

DIRECT-VENT GAS PRODUCTS

SÓLAS

CONTEMPORARY FIRE



DELIVERING THE LIGHT, BEAUTY & WARMTH OF FIRE

SLIM-LINE BUILT-IN MODELS..... 4
SEVENTY2 Single-Sided, or See-Thru
SIXTY0 Single-Sided, or See-Thru
FORTY8 Single-Sided, or See-Thru
FORTY6 with Integrated Cool Zone
TWENTY6 with Integrated Cool Zone
ONE6 with Integrated Cool Zone

THIRTY8 BUILT-IN 14

SELF-CALIBRATING POWER VENT 16

COOL ZONE TECHNOLOGY17

**WALL-MOUNT FIREPLACE
DIRECT-VENT 18**
FORTY6 DV
TWENTY6 DV
ONE6 DV

FIREPLACE INSERT 22
TWENTY6 FI

FREESTANDING STOVE..... 24
ONE6 FS

MEDIA OPTIONS27

Cover Image: SÓLAS SEVENTY2 Slim-Line Built-In
shown with Birch Log Set

© 2025 SÓLAS, LLC.

The images seen in this catalog may appear to depict inaccuracies from the required clearances to combustibles. Please refer to the installation manual for complete installation requirements.

Product specifications subject to change without notice.



SÓLAS

The name SÓLAS derives from the Gaelic word meaning “Light.” At SÓLAS, we deliver light and transform homes with the warmth and beauty of fire.

Why Choose SÓLAS?

FINEST QUALITY – MADE IN USA

INNOVATIVE AWARD-WINNING DESIGNS

EASE OF INSTALLATION & SERVICE

STATE-OF-THE-ART GAS CONTROLS

SIMPLE OPERATION

INDUSTRY LEADER

**SÓLAS Products are Expertly Designed,
Skillfully Manufactured &
Built to Last a Lifetime**



PROUDLY DESIGNED
& BUILT IN USA

SLIM-LINE

BUILT-IN

The state-of-the-art SÓLAS Slim-Line Built-In gas fireplaces can be installed almost anywhere. Only 12 inches deep and with a low overall height, installation space requirements are reduced to an absolute minimum.



SEVENTY² SEE-THRU SHOWN WITH STAINLESS STEEL TRIM
& SELF-CALIBRATING POWER VENT SYSTEM

Slim
12"
Depth



SEVENTY2 SLIM-LINE BUILT-IN (6 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

The SEVENTY2 with its 6 feet of vibrant flame, will add a dramatic focal point to any room. Our ultra-linear Single-Sided or See-Thru models make a bold architectural statement while occupying minimal floor space with its industry-leading shallow depth of only 12". Designed to inspire, the sleek SEVENTY2 is engineered for exceptional elegance and efficiency.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the SEVENTY2

- > SÓLAS Self-Calibrating Power Vent System (pg 16)
- > SÓLAS Cool Zone Technology (pg 17)
- > Birch Log Set, Maple Log Set & Colored Glass
(see page 27)

Viewing Area Trim Options*



Optional ½" (12.7mm) Satin Black or
Stainless Steel Trim Around Viewing Area
*Not compatible with Cool Zone Kit

Certified by PFS-TECO, to ANSI Z21.88-2014 / CSA 2.33-2014 Vented Gas
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance
For Use At High Altitudes.

Features

- **Slim 12" (305mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Choice of Left or Right Side Venting
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications


BTU Rate Range (LP)	40,000 - 28,000/hr
BTU Rate Range (NG)	34,000 - 27,000/hr
Viewing Area	73" (1854mm) W x 12 ½" (318mm) H
Dimensions	87 ⅝" (2225mm) W x 29" (737mm) H x 12" (305mm) D
Venting	4" x 6 ⅝" Direct-Vent
Minimum Flue Vertical	24" (610mm)
Blower	Standard Variable Speed Blower
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

SLIM-LINE

BUILT-IN

The SÓLAS Slim-Line is the slimmest fireplace on the market providing flexibility and ease for installation. The Slim-Line Built-In fireplace will make a bold architectural statement while occupying minimal floor space.

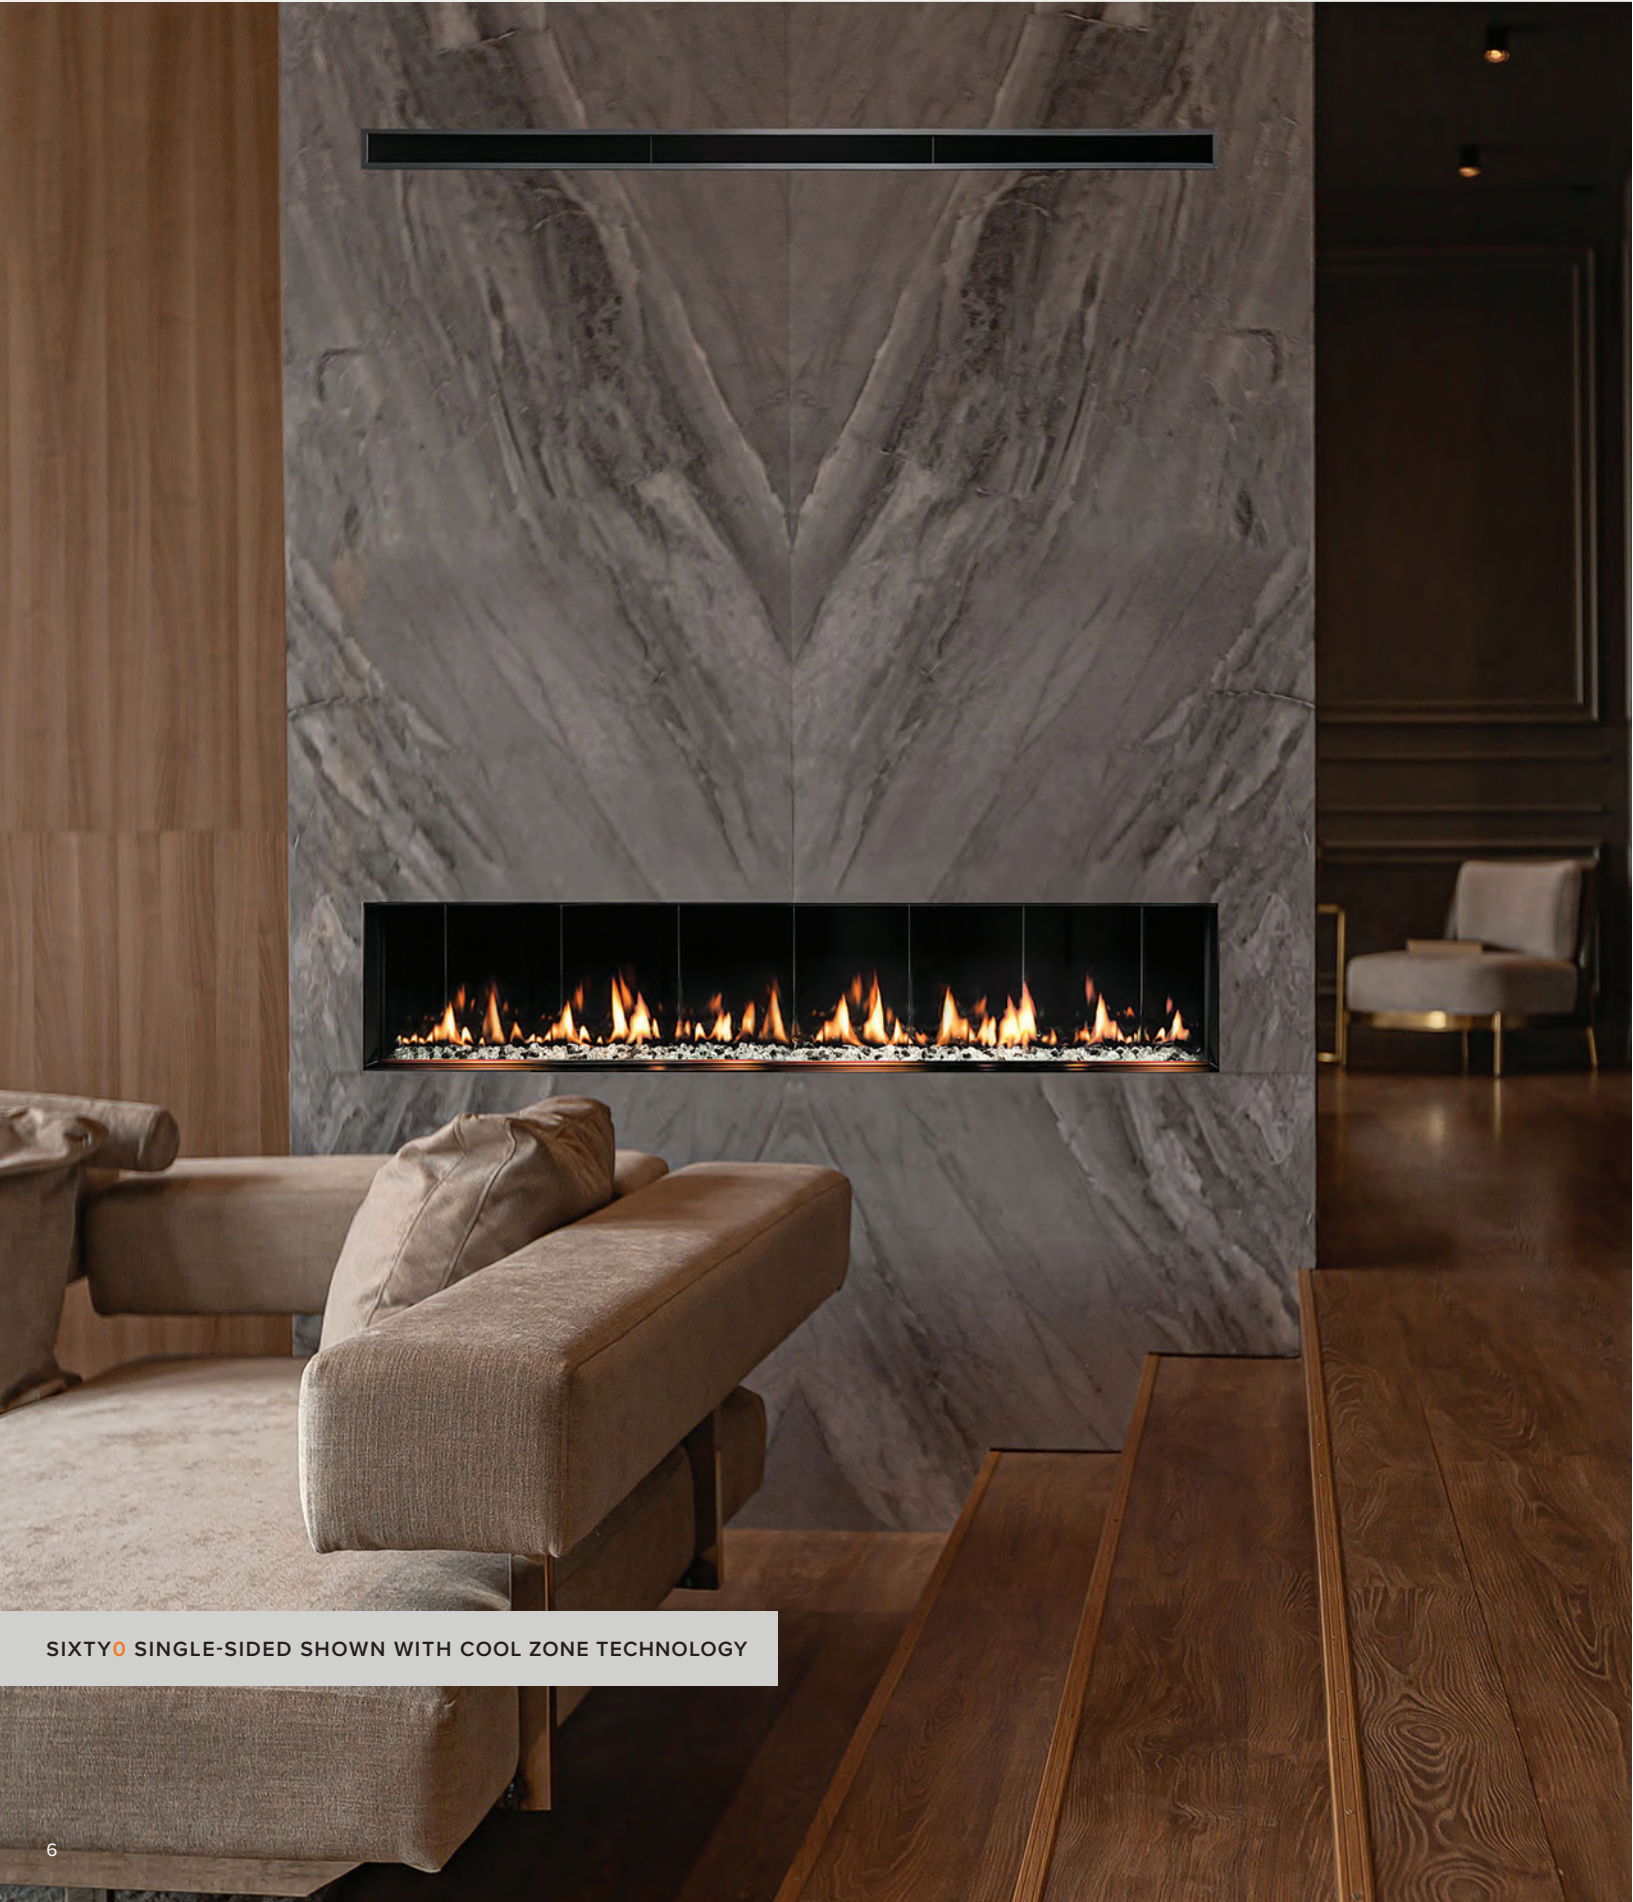

SIXTY SINGLE-SIDED SHOWN WITH COOL ZONE TECHNOLOGY

SIXTY0 SEE-THRU

Slim
12"
Depth



SIXTY0 SLIM-LINE BUILT-IN

(5 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

Create new perspectives with our Single-Sided or See-Thru model SIXTY0 fireplaces. Our Single-Sided model SIXTY0 will add a dramatic focal point in larger rooms while the See-Thru SIXTY0 will allow you to enjoy the full firebox flames from more than one room and from different angles. Aesthetic and installation options abound with the highly-efficient model SIXTY0.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the SIXTY0

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **SÓLAS Cool Zone Technology** (pg 17)
- > **Birch Log Set, Maple Log Set & Colored Glass** (see page 27)

Viewing Area Trim Options*



Optional 1/2" (12.7mm) Satin Black or
Stainless Steel Trim Around Viewing Area
*Not compatible with Cool Zone Kit

*Certified by PFS-TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance
For Use At High Altitudes.*

Features

- **Slim 12" (305mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Choice of Left or Right Side Venting
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications

BTU Rate Range (LP)	34,000 - 25,000/hr
BTU Rate Range (NG)	30,000 - 21,000/hr
Viewing Area	59" (1499mm) W x 12 1/2" (318mm) H
Dimensions	73 5/8" (1870mm) W x 29" (737mm) H x 12" (305mm) D
Venting	4" x 6 5/8" Direct-Vent
Minimum Flue Vertical.....	24" (610mm)
Blower	Standard Variable Speed Blower
Remote Control.....	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

SLIM-LINE

BUILT-IN

SÓLAS Slim-Line series are highly-efficient while conveniently sized for homes and commercial settings. Engineered for exceptional elegance and efficiency.



FORTY8 SEE-THRU



FORTY8 SLIM-LINE BUILT-IN

(4 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

This versatile fireplace, Single-Sided or See-Thru, adds contemporary ambiance to a variety of room settings. Highly-efficient while conveniently sized for homes and commercial settings, the FORTY8 is versatile for a range of architectural applications. The model FORTY8 is the answer for transforming any space with an uncomplicated installation.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the FORTY8

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **SÓLAS Cool Zone Technology** (pg 17)
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Viewing Area Trim Options*



Optional ½" (12.7mm) Satin Black or
Stainless Steel Trim Around Viewing Area
*Not compatible with Cool Zone Kit

*Certified by PFS-TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance
For Use At High Altitudes.*

Features

- **Slim 12" (305mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Choice of Left or Right Side Venting
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications

BTU Rate Range (LP)	30,000 - 19,000/hr
BTU Rate Range (NG)	26,000 - 16,000/hr
Viewing Area	49" (1245mm) W x 12 ½" (318mm) H
Dimensions	63 ⅝" (1616mm) W x 29" (737mm) H x 12" (305mm) D
Venting	4" x 6⅝" Direct-Vent
Minimum Flue Vertical.....	12" (305mm)
Blower	Standard Variable Speed Blower
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

SLIM-LINE
BUILT-IN
WITH INTEGRATED COOL ZONE

NEW compact Slim-Line Built-In gas fireplace with Integrated Cool Zone Technology. The SÓLAS Cool Zone Technology makes installation extremely versatile and provides many design options.



NEW

**FORTY6 SLIM-LINE BUILT-IN WITH INTEGRATED COOL ZONE TECHNOLOGY
SHOWN WITH BIRCH LOG SET**



NEW

FORTY6 SLIM-LINE BUILT-IN WITH INTEGRATED COOL ZONE TECHNOLOGY

**Ultra Slim
11 1/4"
Depth**

FORTY6 SLIM-LINE BUILT-IN

DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

The NEW FORTY6 Slim-Line Built-In with integrated Cool Zone Technology offers high efficiency and ambiance in one package. With a depth of only 11 1/4" – it is one of the slimmest fireplaces available.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the FORTY6 Slim-Line Built-In

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Cool Zone Plenum Trim Options



Available *Satin Black*
or *Pure White*

Certified by PFS-TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

Features

- **Ultra Slim 11 1/4" (286mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Integrated Cool Zone Technology
- A True "Zero Clearance" Enclosure
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- 1" Viewing Area Trim, Satin Black
- Variable Speed Comfort Blower - Remote Control Operated
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery Backup
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications

BTU Rate Range (LP)	29,000 - 19,000/hr
BTU Rate Range (NG)	29,000 - 19,000/hr
Viewing Area	49" (1244mm) W x 12 3/4" (324mm) H
Dimensions	57" (1448mm) W x 63 1/2" (1613mm) (min. Ht.) 129 1/2" (3289mm) (max. Ht.) x 11 1/4" (283mm) D
Venting	5" x 8" Direct-Vent, up to 30' (6.10m) Vertical & up to 10' (3.05m) Horizontal
Minimum Flue Vertical.....	0" (0 mm)
Blower	Standard Variable Speed Blower
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

NEW

TWENTY6 SLIM-LINE BUILT-IN WITH INTEGRATED COOL ZONE TECHNOLOGY

**Ultra Slim
11 1/4"
Depth**



TWENTY6 SLIM-LINE BUILT-IN

DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

Energy efficient, compact, built-in gas fireplace. The **NEW TWENTY6 Slim-Line Built-In** with integrated Cool Zone Technology offers high efficiency and ambiance in one package. With a depth of only 11 1/4" – it is one of the slimmest fireplaces available.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the TWENTY6 Built-In

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Cool Zone Plenum Outlet Trim Options



*Available Satin Black
or Pure White*

Certified by PFS-TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

Features

- **Ultra Slim 11 1/4" (286mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Integrated Cool Zone Technology
- A True "Zero Clearance" Enclosure
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- 1" Viewing Area Trim, Satin Black
- Variable Speed Comfort Blower - Remote Control Operated
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery Backup
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications

BTU Rate Range (LP)	19,000 - 11,000/hr
BTU Rate Range (NG)	19,000 - 11,000/hr
Viewing Area	29 7/8" (759mm) W x 14 3/8" (365mm) H
Dimensions	37 5/8" (956mm) W x 66" (1676mm) (min. Ht.) 132" (3353mm) (max. Ht.) x 11 1/4" (286mm) D
Venting	4" x 6 5/8" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal
Minimum Flue Vertical	0" (0mm)
Blower	Standard Variable Speed Blower
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com



NEW

ONE6 SLIM-LINE BUILT-IN WITH INTEGRATED COOL ZONE TECHNOLOGY, SHOWN WITH MAPLE LOG SET

**Ultra Slim
11 1/4"
Depth**

ONE6 SLIM-LINE BUILT-IN

DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

The **NEW ONE6 Slim-Line Built-In** brings contemporary, built-in styling in a smaller format. It fits perfectly in bathrooms, bedrooms, and any intimate space you would like extra ambiance and warmth. It comes with an integrated Cool Zone system making installation extremely versatile.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the ONE6 Built-In

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Cool Zone Plenum Trim Options



Available *Satin Black*
or *Pure White*

Features

- **Ultra Slim 11 1/4" (286mm) Depth for Greater Installation Flexibility & Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Integrated Cool Zone Technology
- A True "Zero Clearance" Enclosure
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- 1" Viewing Area Trim, Satin Black
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery Backup
- Standard Clear/Black Reflective Glass Media, additional options on page 27

Specifications

BTU Rate Range (LP)	13,500 - 7,500/hr
BTU Rate Range (NG)	13,500 - 7,500/hr
Viewing Area	17 7/8" (455mm) W x 16 3/4" (425mm) H
Dimensions	25 1/4" (641mm) W x 68 1/2" (1740mm) (min. Ht.) 134 1/2" (3416mm) (max. Ht.) x 11 1/4" (286mm) D
Venting	4" x 6 5/8" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal
Minimum Flue Vertical	0" (0mm)
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

Certified by PFS-TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

THIRTY8


BUILT-IN

The SÓLAS THIRTY8 Built-In gas fireplace is a timeless classic—providing virtually endless design possibilities. Whether your style is modern contemporary or uniquely traditional—the versatility of the SÓLAS THIRTY8 delivers the look you desire!



THIRTY8 SHOWN WITH PORCELAIN ENAMEL FIREBOX, AUREO REFLECTIVE GLASS MEDIA AND COOL ZONE TECHNOLOGY


Firebox Panel Kit Options




Satin Black Steel




Slate Stone



White Brick



Red Brick



Reflective Porcelain Enamel

THIRTY8 SHOWN WITH WHITE BRICK FIREBOX & MAPLE LOG SET

Traditional or Contemporary you choose!



THIRTY8 BUILT-IN DIRECT-VENT GAS FIREPLACE

The award-winning SÓLAS THIRTY8 Built-in Gas Fireplace is a classic that offers many contemporary elements appealing to transitional design tastes. It is ideal for consumers who want the most innovative features in a traditionally shaped fireplace. The SÓLAS THIRTY8 is easily customizable to meet installation and interior design needs. Customers can choose from a variety of burners, firebox panels and trim options allowing for limitless design possibilities.

SÓLAS One-Touch Remote
Thermostatic Remote Control
(standard feature)



Options for the THIRTY8

- > **SÓLAS Self-Calibrating Power Vent System** (pg 16)
- > **SÓLAS Cool Zone Technology** (pg 17)
- > **Maple Log Set & Colored Glass** (see page 27)

Viewing Area Trim Options



*Satin Black Trim as standard,
optional Stainless Steel available*

Features

- Customize with 5 Firebox Panel Kits
- Operates on Natural Gas or Liquid Propane
- Choice of Realistic Log Set or Glass Media Burner
- SÓLAS One-Touch Thermostatic Remote Control
- Variable Speed Comfort Blower - Remote Control Operated
- Radiant Ceramic Glass for Increased Heat Transfer
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Large Clean Face Design
- Direct-Vent Technology, Heater Rated
- Integrated Modern-Mesh Safety Screen
- Battery Backup

Specifications

BTU Rate Range (LP)37,000 - 27,000/hr
BTU Rate Range (NG)40,500 - 28,000/hr
Viewing Area39 5/8" W (1006mm) x 32 1/4" H (819mm)
Dimensions42 3/4" W (1085mm) x 35 1/2" H (902mm) x 21" D (533mm)
Venting4" x 6 5/8" Direct-Vent
Minimum Flue Vertical12" (305mm)
Blower Standard Variable Speed Blower
Remote ControlSÓLAS One-Touch Thermostatic Remote

For additional product information, please visit solasfires.com

Certified by PFS TECO to ANSI Z21.88-2016/CSA 2.23-2016 Vented Gas Fireplace Heaters and CAN/CGA-2.17-2017, Gas-Fired Appliances For Use At High Altitudes.

SÓLAS SELF-CALIBRATING POWER VENT SYSTEM



**Best
Power Vent
in the
Industry**

The **SÓLAS Self-Calibrating System** offers maximum design flexibility in any room with vent runs of up to 130 feet possible. Venting can be run vertically, horizontally, and with the ability to vent downward up to 6 feet.

The **SÓLAS** difference is in our proprietary **Self-Calibrating Technology**. With the push of a button, the Self-Calibrating control automatically adjusts and sets the appropriate air restriction settings required for the vent run. Every vent configuration is unique, and this feature eliminates the need for the installer to manually select the “appropriate” air restrictor setting.


Power Vent System Features

- Self-Calibrating
- Run up to 130 feet of pipe
- Utilize up to 8, 90 degree elbows
- Vent down up to 6 feet

Terminations available:

- Sleek Flush Mount
- Surface Mount
- Vertical Mount

The Self-Calibrating Power Vent System is compatible with all SÓLAS Wall-Mount, Free-Standing, Slim-Line and Built-In Direct-Vent models.

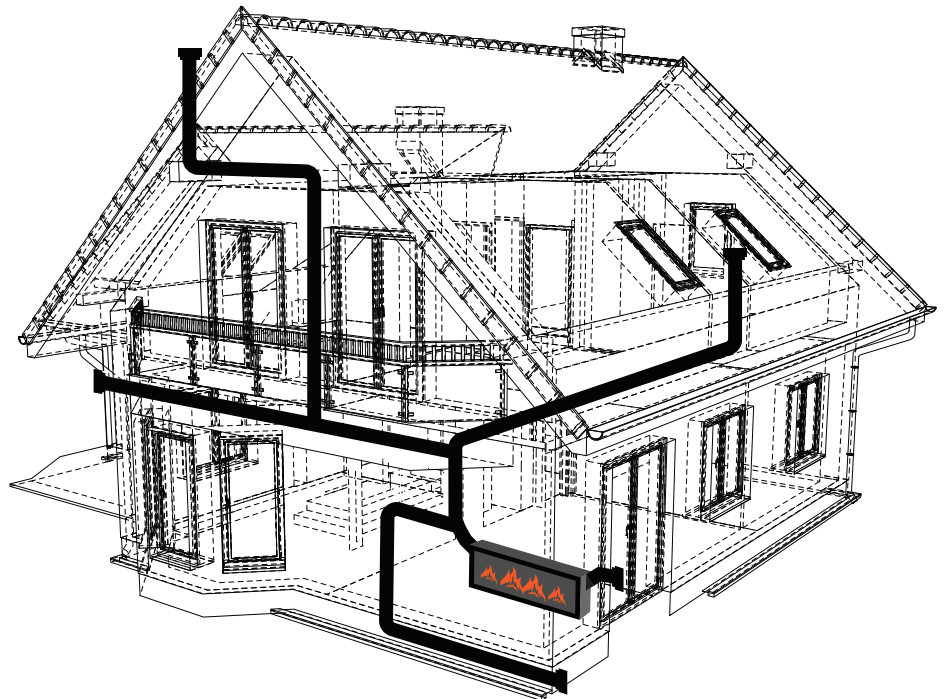

SÓLAS COOL ZONE TECHNOLOGY



Endless
Design
Options

SÓLAS Cool Zone Technology efficiently manages the surface temperatures on surrounding walls, eliminating limitations on the design elements your architect or designer can specify.


The Cool Zone Technology is designed to redirect heat buildup from within the fireplace enclosure back into the room, minimizing the heat loss typically seen with noisy fan-based cooling technologies. Redirecting this heat from within the walls allows for virtually endless design possibilities without fear of heat damage or design obstacles.

SÓLAS Cool Zone Technology enables the installation of design features above the fireplace, and safeguards against wall heat damage, such as:

- Negative effects on TVs, electrical components and fine art
- Cracking marble and sensitive material
- Peeling or discoloring of paint
- Melting of glue adhesives used in tiling
- Deforming or warping of surrounding walls

COOL ZONE TECHNOLOGY WALL TEMPERATURE DIFFERENCE

DISTANCE ABOVE FIREBOX	INDUSTRY STANDARD	SÓLAS COOL ZONE TECHNOLOGY
0 - 6.0"	280° F - 380° F (138° C - 193° C)	120° F (49° C)
6.0" - 12.0"	240° F - 320° F (116° C - 160° C)	100° F (38° C)
12"	180° F - 300° F (82° C - 149° C)	80° F (27° C)

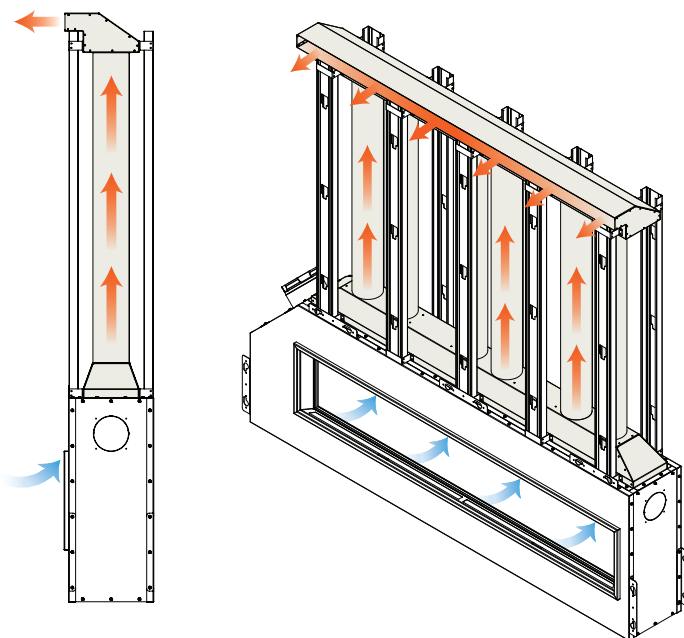

The Cool Zone Technology is compatible with all SÓLAS Slim-Line Built-In and THIRTY8 Built-In Fireplaces. Please refer to the installation manual for complete specifications and installation requirements.

DIRECT-VENT

WALL-MOUNT

Transform any room in your house with ease with a modern SÓLAS Wall-Mount gas fireplace. Available in three sizes, and six surround finishes, the SÓLAS wall-mount fireplace will easily deliver warmth and ambiance.



FORTY6 SHOWN WITH STAINLESS STEEL SURROUND

Wall-Mount Surround Options for the FORTY6, TWENTY6 & ONE6



Stainless Steel



Stainless Steel & Satin Black
(with Optional Birch Log Set)



Steel Grey (with Optional Birch Log Set)



Satin Black



Stainless Steel &
Steel Grey



Pure White
(with Optional Birch Log Set)

Certified by PFS•TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09



FORTY6 SHOWN WITH STEEL GREY SURROUND

Simply
Hangs on
Wall!

FORTY6 WALL-MOUNT DIRECT-VENT GAS FIREPLACE

The SÓLAS FORTY6 is a linear wall-mount, direct-vent, gas fireplace. The unique wall-mount design allows for an easy, low-cost installation, eliminating the need for major renovations. Simply hang the fireplace on the wall to add a dramatic focal point to any interior!

The unit's high-quality reflective porcelain enamel firebox liner serves to mirror the flames, adding depth and beauty. This modern gas fireplace comes standard with the SÓLAS One-Touch remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically maintaining your desired room temperature.

Options for the FORTY6

- > **Six Surround Finishes** (see previous page)
- > **SÓLAS Self-Calibrating Power Vent System**
See page 16 for more information
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Features

- **Thin 8" (194mm) Depth for Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Unique, SÓLAS Wall-Mount Design
- SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Standard Clear/Black Reflective Glass Media, additional options on page 27

SÓLAS
One-Touch
Remote



Specifications

BTU Rate Range (NG)	29,000 - 19,000/hr
BTU Rate Range (LP)	29,000 - 19,000/hr
Viewing Area	46" (1168mm) W x 12" (305mm) H
Dimensions	58 3/8" (1483mm) W x 25 1/4" (641mm) H x 8" (194 mm) D
Maximum Observed	
Steady State Efficiency	78.5% / 79.0%
Remote Control	SÓLAS One-Touch Thermostatic Remote
Venting	5" x 8" Direct-Vent, up to 30' (6.10m) Vertical & up to 10' (3.05m) Horizontal

For additional product information, please visit solasfires.com



Simply
Hangs on
Wall!

TWENTY6 SHOWN WITH STAINLESS STEEL
& SATIN BLACK SURROUND

TWENTY6 WALL-MOUNT DIRECT-VENT GAS FIREPLACE

The SÓLAS TWENTY6 is a modern wall-mount, direct-vent gas fireplace. This popular size features easy installation plus all of the conveniences of a gas fireplace. Virtually endless installation possibilities, it's almost as easy as hanging a picture on the wall. The TWENTY6 is a modern gas fireplace that offers a spectacular flame picture, enhanced by the reflective porcelain enamel firebox liner.

The SÓLAS TWENTY6 has an optional Corner Mounting Kit available, allowing the unit to be mounted directly into a corner, saving space.

Options for the TWENTY6

- > **Six Surround Finishes** (see page 18)
- > **Corner Installation Kit**
- > **SÓLAS Self-Calibrating Power Vent System**
See page 16 for more information
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09

Features

- **Thin 7 5/8" (194mm) Depth for Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Unique, SÓLAS Wall-Mount Design
- SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Standard Clear/Black Reflective Glass Media, additional options on page 27

SÓLAS
One-Touch
Remote



Specifications

BTU Rate Range (NG)	19,000 - 11,000/hr
BTU Rate Range (LP)	19,000 - 11,000/hr
Viewing Area	26" (660mm) W x 14½" (368mm) H
Dimensions	38¾" (984mm) W x 27¼" (692mm) H
.....	x 7⅝" (194mm) D
Maximum Observed Steady State Efficiency	78.8% / 79.5%
Remote Control	SÓLAS One-Touch Thermostatic Remote
Venting	4" x 6⅝" Direct-Vent, up to 20' (6.10m)
.....	Vertical and 10' (3.05m) Horizontal

For additional product information, please visit solasfires.com



ONE6 SHOWN WITH PURE WHITE SURROUND & BIRCH LOG SET

ONE6 WALL-MOUNT

DIRECT-VENT GAS FIREPLACE

The SÓLAS ONE6 brings contemporary styling in a smaller, portrait format. Perfect for bathrooms, bedrooms and anywhere you would like extra ambiance and warmth. The versatile ONE6 is heater-rated and offers a beautiful flame picture, enhanced by the reflective porcelain enamel firebox liner. A perfect solution for Tiny Homes and “off-the-grid” living. This unit will run a full fireplace season on only (4) AA batteries!

The SÓLAS ONE6 has an optional Corner Mounting Kit available which helps save more space and delivers a unique focal point.

Options for the ONE6

- > **Six Surround Finishes** (see page 18)
- > **Corner Installation Kit**
- > **SÓLAS Self-Calibrating Power Vent System**
See page 16 for more information
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Features

- **Thin 7 5/8" (194mm) Depth for Minimal Footprint**
- Operates on Natural Gas or Liquid Propane
- Unique, SÓLAS Wall-Mount Design
- SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Rear Vented, Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Standard Clear / Black Reflective Glass Media, additional options on page 27

SÓLAS
One-Touch
Remote



Specifications

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Viewing Area	16" (406mm) W x 18" (457mm) H
Dimensions	23½" (597mm) W x 30" (762mm) H x 7⅝" (194mm) D
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Remote Control	SÓLAS One-Touch Thermostatic Remote
Venting	4" x 6⅝" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal

For additional product information, please visit solasfires.com

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09

TWENTY6 FI
INSERT

The SÓLAS TWENTY6 FI is a versatile and stylish fireplace insert. It has a clean modern look and brings high-efficiency to an inefficient fireplace. With a depth of only 14 ¼", it is one of the slimmest inserts in the industry, enabling it to fit in the smallest of spaces.



TWENTY6 FI SHOWN WITH SATIN BLACK & STAINLESS STEEL COMBINATION, SURROUND

TWENTY6 FI Surround Options



Satin Black



Satin Black & Stainless Steel Combination



Satin Black & Steel Grey Combination



Steel Grey & Stainless Steel Combination (with Optional Birch Log Set)

Surround Sizes

Standard Surround.....	38" (965mm) W x 26" (660mm) H
Optional Sizes	40" (1016mm) W x 29" (737mm) H
	44" (1118mm) W x 32" (813mm) H
Symmetrical Size.....	40" (1016mm) W x 25" (635mm) H

Ask About SÓLAS Custom Surround Sizes!



TWENTY6 FI SHOWN WITH SATIN BLACK & STEEL GREY SURROUND & BIRCH LOG SET

Slim
14 1/4"
Depth

TWENTY6 FI

DIRECT-VENT GAS FIREPLACE INSERT

The SÓLAS TWENTY6 FI is a uniquely contemporary fireplace insert that offers consumers the option of upgrading their existing wood-burning fireplace to a high-efficiency, direct-vent gas heater. Minimalist design lets the beauty of the flame speak for itself, with the view of the fire being enhanced by the high-quality, reflective porcelain enamel firebox liner.

The SÓLAS TWENTY6 FI is compact in size, with a depth of only 14 1/4", it is one of the slimmest inserts in the industry, enabling it to fit in the smallest of fireplaces. It comes standard with a variable speed comfort blower and the SÓLAS One-Touch, programmable thermostatic remote control.

Options for the TWENTY6 FI

- > **Four Surround Finishes** (see previous page)
- > **Custom Surround Sizing Available**
- > **Birch Log Set, Maple Log Set & Colored Glass** (see page 27)

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.41-09

Features

- **Slim 14 1/4" (362mm) Depth for Installation Versatility**
- Operates on Natural Gas or Liquid Propane
- SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liner
- Direct-Vent Technology, Heater Rated
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Variable Speed Comfort Blower - Remote Control Operated
- 4 Interchangeable Surround Finishes
- Integrated Modern-Mesh Safety Screen
- Battery Backup
- Standard Clear/Black Reflective Glass Media, additional options on page 27

SÓLAS
One-Touch
Remote



Specifications

BTU Rate Range (NG)	19,500 - 14,000/hr
BTU Rate Range (LP)	19,500 - 16,000/hr
Viewing Area	26" (660mm) W x 10 1/2" (267mm) H
Dimensions	29 3/4" (756mm) W x 20 3/4" (527mm) H x 14 1/4" (362mm) D

Maximum Observed	
Steady State Efficiency	79.0% / 80.0%
Variable Speed Blower	Standard
Remote Control	SÓLAS One-Touch Thermostatic Remote
Venting	3" x 3" Co-Linear Direct-Vent, 36' (11m) Maximum

For additional product information, please visit solasfires.com

ONE6 FS

FREESTANDING

A timeless, classic design with modern functionality. Whether you're looking to heat a remote cabin or deliver extra coziness to an urban apartment – the SÓLAS ONE6 Freestanding Stove fits any interior.



ONE6 FS SHOWN IN SATIN BLACK, REAR VENT

ONE6 FS Finish Options



Satin Black



Satin Black with Steel Grey Front (shown with Optional Maple Log Set)



Steel Grey



ONE6 FS SHOWN WITH SATIN BLACK & STEEL GREY FRONT AND BIRCH LOGS, TOP VENT

1"
Clearance to Combustibles
(Sides & Back)

ONE6 FS

FREESTANDING DIRECT-VENT GAS STOVE

The SÓLAS ONE6 FS is a contemporary freestanding, direct-vent gas stove that fits both traditional and modern decor. Minimalist design lets the beauty of the flame speak for itself, with the view of the fire being enhanced by the reflective porcelain enamel firebox liner. A perfect solution for Tiny Homes and “off-the-grid” living. The ONE6 FS will run a full fireplace season on only (4) AA batteries!

The SÓLAS ONE6 FS can be set up for top, rear or down venting with the optional SÓLAS Self-Calibrating Power Vent Technology. A SÓLAS One-Touch remote control is supplied and allows for manual operation or can be programmed to maintain your room temperature at a set comfort level.

Options for the ONE6 FS

- > **Three Finishes** (see previous page)
- > **SÓLAS Self-Calibrating Power Vent System**
See page 16 for more information
- > **Birch Log Set, Maple Log Set & Colored Glass**
(see page 27)

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09

Features

- High-Efficiency, Direct-Vent Gas Stove
- Operates with Natural Gas or Propane
- SÓLAS One-Touch Thermostatic Remote Control
- Direct-Vent Technology, Heater Rated
- Three Finish Options
- Reflective Porcelain Firebox Liner
- Battery-Operation (lasting up to one fireplace season)
- Integrated Modern-Mesh Safety Screen
- Top or Rear Vent Option
- Standard Clear/Black Reflective Glass Media, additional options on page 27
- Optional Variable Speed Comfort Blower

SÓLAS One-Touch Remote



Specifications

BTU Rate Range (NG)	13,500 - 7,500/hr
BTU Rate Range (LP)	13,500 - 7,500/hr
Viewing Area	16" (406mm) W x 18" (457mm) H
Dimensions	23 1/8" (587mm) W x 18 7/8" (479mm) D x 40 3/4" (1035mm) H
Maximum Observed Steady State Efficiency	79.0% / 77.8%
Remote Control	Standard
Venting	4" x 6 5/8" Direct-Vent, Top or Rear Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal

For additional product information, please visit solasfires.com

THIRTY8 BUILT-IN WITH SLATE STONE FIREBOX
& MAPLE LOG SET



MEDIA OPTIONS

Please Note: All Direct-Vent models come standard with Clear / Black Reflective glass media. Optional Birch and Maple Log Sets available (see below).

Model THIRTY8 with glass media burner comes standard with Aureo Reflective media on the burner and Black Reflective media on the media tray. Optional Maple Log Set available (below).

Glass Media




Aureo Reflective



Cerulean



Cyprium

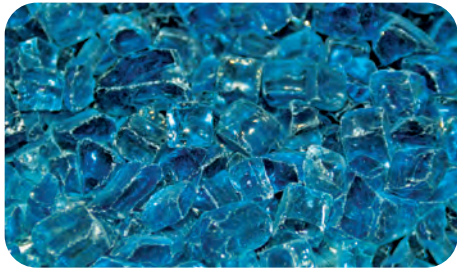


La Mer



Sapphire Reflective



Clear

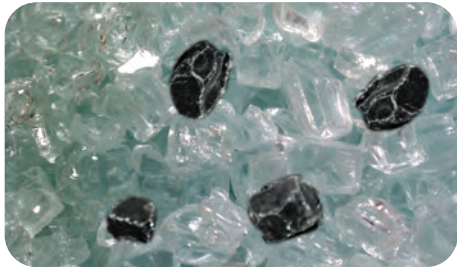

Clear/Black Reflective



Black Reflective

Log Sets



Birch Log Set Kit
For Direct-Vent Wall-Mount,
Fireplace Insert, Freestanding Stove
and all Slim-Line Built-In models



Maple Log Set Kit
For Direct-Vent Wall-Mount,
Fireplace Insert, Freestanding Stove
and all Slim-Line Built-In models



THIRTY8 Maple Log Set Kit
For THIRTY8 Model with Log Set Burner

SÓLAS

CONTEMPORARY FIRE



SÓLAS Photo Gallery

PROUDLY DESIGNED
& BUILT IN THE

USA



SÓLAS Video Gallery

A Division of Progressive Manufacturing Inc.

452 SUNAPEE STREET, NEWPORT, NH 03773
(603) 298-5169

solasfires.com