

# SÓLAS

CONTEMPORARY FIRE



DELIVERING THE LIGHT, BEAUTY & WARMTH OF FIRE



<b>SLIM-LINE BUILT-IN MODELS.....</b>	<b>4</b>
<b>SEVENTY2</b> Single-Sided, or See-Thru	
<b>SIXTY0</b> Single-Sided, or See-Thru	
<b>FORTY8</b> Single-Sided, or See-Thru	
<b>FORTY6</b> with Integrated Cool Zone	
<b>TWENTY6</b> with Integrated Cool Zone	
<b>ONE6</b> with Integrated Cool Zone	
<b>THIRTY8 BUILT-IN .....</b>	<b>14</b>
<b>WALL-MOUNT DIRECT-VENT .....</b>	<b>16</b>
<b>FORTY6</b> DV	
<b>TWENTY6</b> DV	
<b>ONE6</b> DV	
<b>FIREPLACE INSERT.....</b>	<b>20</b>
<b>TWENTY6</b> FI	
<b>FREESTANDING STOVE.....</b>	<b>22</b>
<b>ONE6</b> FS	
<b>OUTDOOR .....</b>	<b>24</b>
<b>FORTY6</b> Outdoor	
<b>TWENTY6</b> Outdoor	
<b>ONE6</b> Outdoor	
<b>SELF-CALIBRATING POWER VENT .....</b>	<b>28</b>
<b>COOL ZONE TECHNOLOGY .....</b>	<b>29</b>
<b>MEDIA OPTIONS .....</b>	<b>31</b>

Cover Image: **SÓLAS SEVENTY2 Slim-Line Built-In** shown with Birch Log Set & Cool Zone Technology

© 2023 SÓLAS, LLC.

The images seen in this catalog may appear to depict inaccuracies from the required clearances to combustibles. Please refer to the installation manual for complete installation requirements.

Product specifications subject to change without notice.



[solasfires.com](https://solasfires.com)

# SÓLAS

The name SÓLAS derives from the Gaelic word meaning “Light.” At SÓLAS, we deliver light and transform homes with the warmth and beauty of fire.

---

## Why Choose SÓLAS?

FINEST QUALITY – MADE IN USA

INNOVATIVE AWARD-WINNING DESIGNS

EASE OF INSTALLATION & SERVICE

STATE-OF-THE-ART GAS CONTROLS

SIMPLE OPERATION

INDUSTRY LEADER

---

**SÓLAS Products  
are Skillfully-Designed,  
Expertly Manufactured &  
Built to Last a Lifetime**



PROUDLY DESIGNED  
& BUILT IN USA



SLIM-LINE

# BUILT-IN

The state-of-the-art SÓLAS Slim-Line Built-In gas fireplaces can be installed almost anywhere. Only 12 inches deep and with a low overall height, installation space requirements are reduced to an absolute minimum.



SEVENTY2 SEE-THRU SHOWN WITH STAINLESS STEEL TRIM  
& SELF-CALIBRATING POWER VENT SYSTEM





## SEVENTY2 SLIM-LINE BUILT-IN

(6 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

The SEVENTY2 with its 6 feet of vibrant flame, will add a dramatic focal point to any room. Our ultra-linear Single-Sided or See-Thru models make a bold architectural statement while occupying minimal floor space with its industry-leading shallow depth of only 12". Designed to inspire, the sleek SEVENTY2 is engineered for exceptional elegance and efficiency.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the SEVENTY2

- > **SÓLAS Self-Calibrating Power Vent System**
- > **SÓLAS Cool Zone Technology**
- > **Birch Log Set & Colored Glass**

See pages 28-31 for more information.

### Trim Options



Certified by PFS-TECO, to ANSI Z21.88-2014 / CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

### Features

- Thin 12" (305mm) Design for Greater Installation Flexibility
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear/Black Reflective Glass Media
- Optional Heat Redistribution Kit
- Optional ½" (12.7mm) Black or Stainless Steel Trim Around Fireplace Opening

### Specifications

BTU Rate Range (LP)	40,000 - 28,000/hr
BTU Rate Range (NG)	34,000 - 27,000/hr
Viewing Area	73" (1854mm) W x 12.52" (318mm) H
Dimensions	87.22" (2215mm) W x 28.83" (732mm) H x 12" (305mm) D
Venting	4" 6⅝" Direct-Vent
Minimum Flue Vertical	24" (610mm)
Blower	Standard Variable Speed
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



SLIM-LINE

# BUILT-IN

The SÓLAS Slim-Line series are one of the slimmest on the market providing flexibility and ease for installation. The Slim-Line Built-In fireplace will make a bold architectural statement while occupying minimal floor space.



SIXTY SINGLE-SIDED SHOWN  
WITH COOL ZONE TECHNOLOGY





## SIXTY0 SLIM-LINE BUILT-IN

### (5 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

Create new perspectives with our Single-Sided or See-Thru model SIXTY0 fireplaces. Our Single-Sided model SIXTY0 will add a dramatic focal point in larger rooms while the See-Thru SIXTY0 will allow you to enjoy the full firebox flames from more than one room and from different angles. Aesthetic and installation options abound with the highly-efficient model SIXTY0.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the SIXTY0

- > SÓLAS Self-Calibrating Power Vent System
- > SÓLAS Cool Zone Technology
- > Birch Log Set & Colored Glass

See pages 28-31 for more information.

### Trim Options



Certified by PFS•TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

### Features

- Thin 12" (305mm) Design for Greater Installation Flexibility
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear/Black Reflective Glass Media
- Optional Heat Redistribution Kit
- Optional ½" (12.7mm) Black or Stainless Steel Trim Around Fireplace Opening

### Specifications

BTU Rate Range (LP) .....	34,000 - 25,000/hr
BTU Rate Range (NG) .....	30,000 - 21,000/hr
Viewing Area .....	59" (1499mm) W x 12.52" (318mm) H
Dimensions .....	73.22" (1860mm) W x 28.83" (732mm) H x 12" (305mm) D
Venting .....	4" x 6⅝" Direct-Vent
Minimum Flue Vertical.....	24" (610mm)
Blower .....	Standard Variable Speed
Remote Control.....	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



SLIM-LINE

# BUILT-IN

SÓLAS Slim-Line series are highly-efficient while conveniently sized for homes and commercial settings. Engineered for exceptional elegance and efficiency.



FORTY8 SEE-THRU SHOWN WITH COOL ZONE TECHNOLOGY



## FORTY8 SLIM-LINE BUILT-IN

(4 FT) SINGLE-SIDED OR SEE-THRU DIRECT-VENT GAS FIREPLACE

This versatile fireplace, Single-Sided or See-Thru, adds contemporary ambiance to a variety of room settings. Highly-efficient while conveniently sized for homes and commercial settings, the FORTY8 is versatile for a range of architectural applications. The model FORTY8 is the answer for transforming any space with an uncomplicated installation.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the FORTY8

- > SÓLAS Self-Calibrating Power Vent System
- > SÓLAS Cool Zone Technology
- > Birch Log Set & Colored Glass

See pages 28-31 for more information.

### Trim Options



Certified by PFS•TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance For Use At High Altitudes.

### Features

- Thin 12" (305mm) Design for Greater Installation Flexibility
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated (x2 for See-Thru Models)
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear/Black Reflective Glass Media
- Optional Heat Redistribution Kit
- Optional ½" (12.7mm) Black or Stainless Steel Trim Around Fireplace Opening

### Specifications


BTU Rate Range (LP)	30,000 - 19,000/hr
BTU Rate Range (NG)	26,000 - 16,000/hr
Viewing Area	49" (1245mm) W x 12.52" (318mm) H
Dimensions	63.22" (1606mm) W x 28.83" (732mm) H x 12" (305mm) D
Venting	4" x 6⅝" Direct-Vent
Minimum Flue Vertical	12" (305mm)
Blower	Standard Variable Speed
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



SLIM-LINE  
**BUILT-IN**  
WITH INTEGRATED COOL ZONE

**NEW** compact Slim-Line Built-In gas fireplace with Integrated Cool Zone Technology. The SÓLAS Cool Zone Technology makes installation extremely versatile and provides many design options.

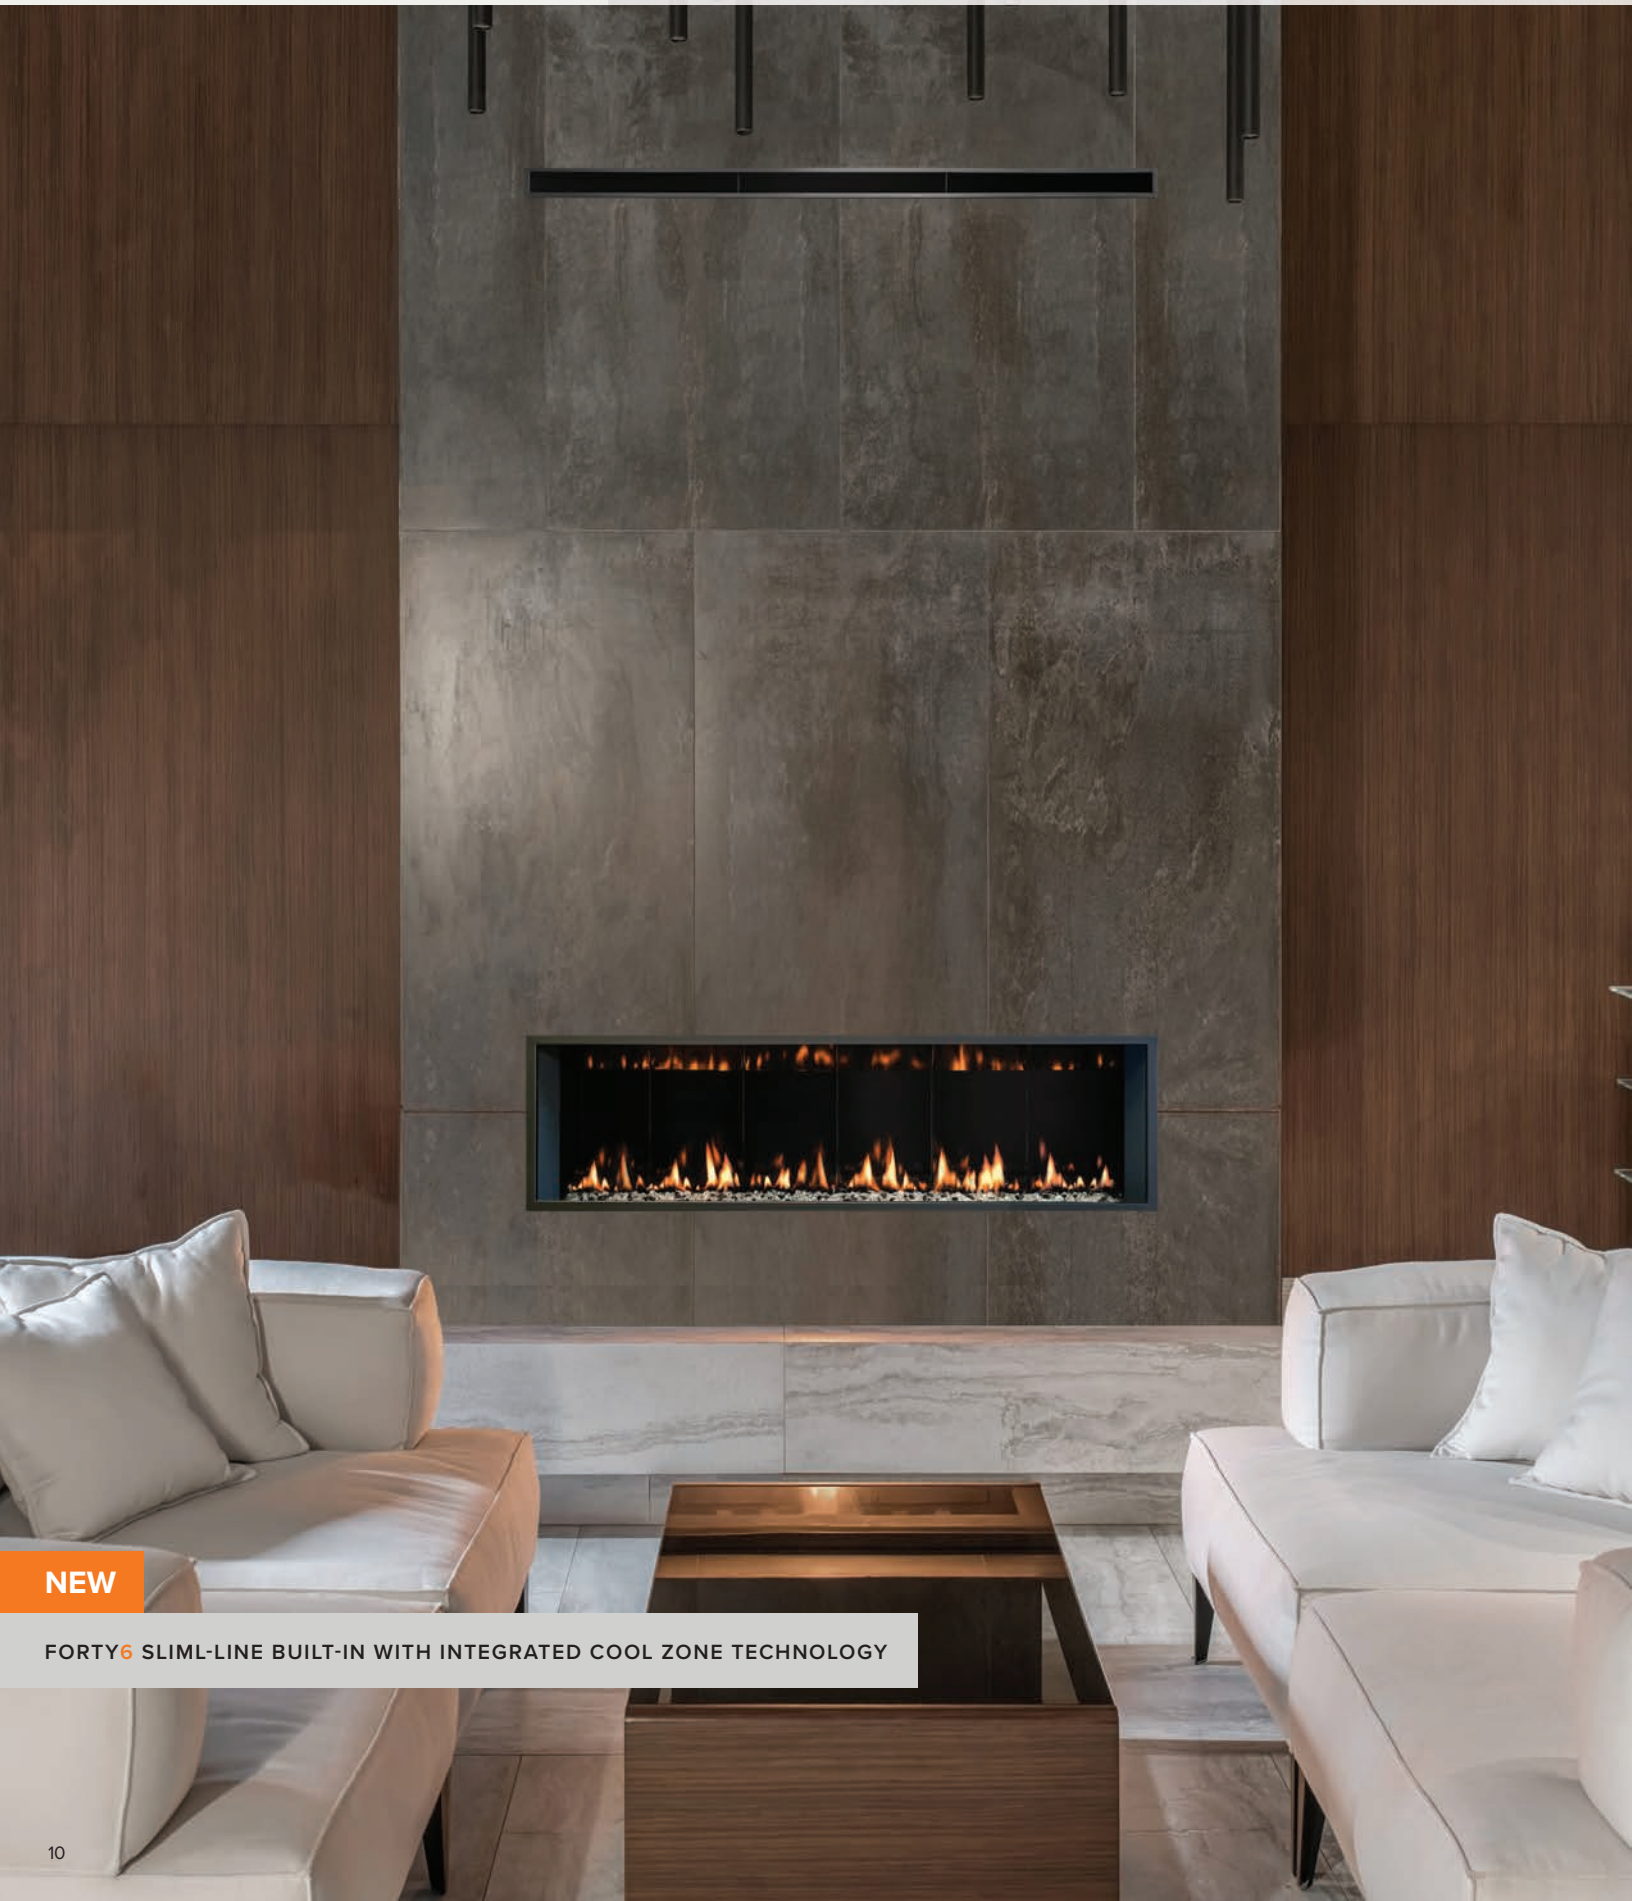

**NEW**

**FORTY6** SLIM-LINE BUILT-IN WITH INTEGRATED COOL ZONE TECHNOLOGY



**NEW**

**FORTY6 SLIM-LINE BUILT-IN WITH  
INTEGRATED COOL ZONE TECHNOLOGY**

## FORTY6 SLIM-LINE BUILT-IN

### DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

The **NEW FORTY6 Slim-Line Built-In** with integrated Cool Zone Technology offers high efficiency and ambiance in one package. With a depth of under 12" – it is one of the thinnest fireplaces available.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the FORTY6 Slim-Line Built-In

- > **SÓLAS Self-Calibrating Power Vent System**
- > **Birch Log Set & Colored Glass**

*See pages 28-31 for more information.*

### Plenum Trim Options



Certified by PFS•TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas  
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance  
For Use At High Altitudes.

### Features

- Thin 11 5/8" (283mm) Design for Greater Installation Flexibility & Minimal Footprint
- A True "Zero Clearance" Enclosure
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear / Black Reflective Glass Media

### Specifications

BTU Rate Range (LP)	.....29,000 - 19,000/hr
BTU Rate Range (NG)	.....29,000 - 19,000/hr
Viewing Area	.....46" (1168mm) W x 14" (356mm) H
Dimensions	.....57" (1448mm) W x 63.5" (1613mm) (min. Ht.) 129.5" (3289mm) (max. Ht.) x 11 5/8" (283mm) D
Venting	.....5" x 8" Direct-Vent, up to 30' (6.10m) Vertical & up to 10' (3.05m) Horizontal
Minimum Flue Vertical	.....0" (0 mm)
Blower	.....Standard Variable Speed
Remote Control	.....SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



**NEW**

**TWENTY6 SLIM-LINE BUILT-IN  
WITH INTEGRATED COOL ZONE  
TECHNOLOGY**



## TWENTY6 SLIM-LINE BUILT-IN

### DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

Energy efficient, compact, built-in gas fireplace.

The **NEW TWENTY6 Slim-Line Built-In** with integrated Cool Zone Technology offers high efficiency and ambiance in one package. With a depth of under 12" – it is one of the thinnest fireplaces available.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the TWENTY6 Built-In

> **SÓLAS Self-Calibrating Power Vent System**

> **Birch Log Set & Colored Glass**

*See pages 28-31 for more information.*

### Plenum Outlet Trim Options



Certified by PFS•TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas  
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance  
For Use At High Altitudes.

### Features

- Thin 11 1/4" (283mm) Design for Greater Installation Flexibility & Minimal Footprint
- A True "Zero Clearance" Enclosure
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Variable Speed Comfort Blower - Remote Control Operated
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear / Black Reflective Glass Media

### Specifications

BTU Rate Range (LP)	.....19,000 - 11,000/hr
BTU Rate Range (NG)	.....19,000 - 11,000/hr
Viewing Area	.....26" (660mm) W x 16 1/32" (356mm) H
Dimensions	.....37 1/32" (950mm) W x 66" (1676mm) (min. Ht.) 132" (3353mm) (max. Ht.) x 11 1/4" (283mm) D
Venting	.....4" x 6 5/8" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal
Minimum Flue Vertical	.....0" (0mm)
Blower	.....Standard Variable Speed
Remote Control	.....SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



**NEW**

**ONE6 SLIM-LINE BUILT-IN WITH  
INTEGRATED COOL ZONE TECHNOLOGY,  
SHOWN WITH BIRCH LOG SET**

## ONE6 SLIM-LINE BUILT-IN

### DIRECT-VENT GAS FIREPLACE WITH INTEGRATED COOL ZONE TECHNOLOGY

The **NEW ONE6 Slim-Line Built-In** brings contemporary, built-in styling in a smaller format. It fits perfectly in bathrooms, bedrooms, and any intimate space you would like extra ambiance and warmth. It comes with an integrated Cool Zone system making installation extremely versatile.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the ONE6 Built-In

> **SÓLAS Self-Calibrating Power Vent System**

> **Birch Log Set & Colored Glass**

See pages 28-31 for more information.

### Plenum Trim Options



Certified by PFS•TECO, to ANSI Z21.88-2014 /CSA 2.33-2014 Vented Gas  
Fireplace Heaters, and CAN/CGA 2.17-M91 (2014), Gas-Fired Appliance  
For Use At High Altitudes.

### Features

- Thin 11 5/16" (283mm) Design for Greater Installation Flexibility & Minimal Footprint
- A True "Zero Clearance" Enclosure
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liners
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Integrated Modern Mesh Safety Screen
- Direct-Vent Technology - Heater Rated
- Battery Backup
- Clear/Black Reflective Glass Media

### Specifications

BTU Rate Range (LP)	.....13,500 - 7,500/hr
BTU Rate Range (NG)	.....13,500 - 7,500/hr
Viewing Area	.....16" (406mm) W x 18" (457mm) H
Dimensions	.....25 1/4" (641mm) W x 68.5" (1740mm) (min. Ht.) 134.5" (3416mm) (max. Ht.) x 11 5/16" (283mm) D
Venting	.....4" x 6 5/8" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal
Minimum Flue Vertical	.....0" (0mm)
Remote Control	.....SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)



THIRTY8


# BUILT-IN

The SÓLAS THIRTY8 Built-In gas fireplace is a timeless classic—providing virtually endless design possibilities. Whether your style is modern contemporary or uniquely traditional—the versatility of the SÓLAS THIRTY8 delivers the look you desire!



THIRTY8 SHOWN WITH PORCELAIN ENAMEL FIREBOX & AUREO REFLECTIVE GLASS MEDIA


## Firebox Panel Kit Options



Satin Black Steel



Slate Stone



White Brick



Red Brick



Porcelain Enamel  
High Gloss





## THIRTY8 BUILT-IN

### DIRECT-VENT GAS FIREPLACE

The award-winning SÓLAS THIRTY8 Built-in Gas Fireplace is a classic that offers many contemporary elements appealing to transitional design tastes. It is ideal for consumers who want the most innovative features in a traditionally shaped fireplace. The SÓLAS THIRTY8 is easily customizable to meet installation and interior design needs. Customers can choose from a variety of burners, firebox panels and trim options allowing for limitless design possibilities.



**SÓLAS One-Touch Remote**  
(standard)



### Options for the THIRTY8

- > SÓLAS Self-Calibrating Power Vent System
- > SÓLAS Cool Zone Technology
- > Maple Log Set & Colored Glass

See pages 28-31 for more information.

### Trim Options



### Features

- Customize with 5 Firebox Panel Kits
- Choice of Realistic Log Set or Glass Media Burner
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Variable Speed Comfort Blower - Remote Control Operated
- Radiant Ceramic Glass for Increased Heat Transfer
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Large Clean Face Design
- Direct-Vent Technology - Heater Rated
- Integrated Modern-Mesh Safety Screen
- Battery Backup

### Specifications

BTU Rate Range (LP)	37,000 - 27,000/hr
BTU Rate Range (NG)	40,500 - 28,000/hr
Viewing Area	36" W x 25¼" H
Dimensions	42¾" W x 35½" H x 21" D
Venting	4" x 6⅝" Direct-Vent
Remote Control	SÓLAS One-Touch Thermostatic Remote

For additional product information, please visit [solasfires.com](http://solasfires.com)

Certified by PFS TECO to ANSI Z21.88-2016/CSA 2.33-2016 Vented Gas Fireplace Heaters and CAN/CGA-2.17-2017, Gas-Fired Appliances For Use At High Altitudes.



DIRECT-VENT

# WALL-MOUNT

Transform any room in your house with ease with a modern SÓLAS Wall-Mount gas fireplace. Available in three sizes, and six surround finishes, the SÓLAS wall-mount fireplace will easily deliver warmth and ambiance.



FORTY6 SHOWN WITH STEEL GREY SURROUND

## Wall-Mount Surround Options for the FORTY6, TWENTY6 & ONE6



Stainless Steel



Stainless Steel & Satin Black  
(with Optional Birch Log Set)



Steel Grey (with Optional Birch Log Set)



Satin Black



Stainless Steel &  
Steel Grey



Pure White  
(with Optional Birch Log Set)

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09



FORTY6 SHOWN WITH STAINLESS STEEL SURROUND



## FORTY6 WALL-MOUNT

### DIRECT-VENT GAS FIREPLACE

The SÓLAS FORTY6 is a linear wall-mount, direct-vent, gas fireplace. The unique wall-mount design allows for an easy, low-cost installation, eliminating the need for major renovations. Simply hang the fireplace on the wall to add a dramatic focal point to any interior!

The unit's high-quality reflective porcelain enamel firebox liner serves to mirror the flames, adding depth and beauty. This modern gas fireplace comes standard with the SÓLAS One-Touch remote control, which not only allows you to light and operate the fireplace but can also be programmed to control the fireplace thermostatically, automatically maintaining your desired room temperature.

### Options for the FORTY6

- > **Six Surround Finishes** (see previous page)
- > **SÓLAS Self-Calibrating Power Vent System**  
See page 28 for more information
- > **Birch Log Set & Colored Glass** (see page 31)

### Features

- Unique, SÓLAS Wall-Mount Design
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Clear / Black Reflective Glass Media
- Optional Birch Log Set



### Specifications

BTU Rate Range (NG) .....	29,000 - 19,000/hr
BTU Rate Range (LP) .....	29,000 - 19,000/hr
Glass Viewing Area.....	46" (1168mm) W x 12" (305mm) H
Dimensions .....	58 $\frac{3}{8}$ " (1483mm) W x 25 $\frac{1}{4}$ " (641mm) H x 8" (203 mm) D
Maximum Observed Steady State Efficiency .....	78.5% / 79.0%
Remote Control .....	SÓLAS One-Touch Thermostatic Remote
Venting .....	5" x 8" Direct-Vent, up to 30' (6.10m) Vertical & up to 10' (3.05m) Horizontal

For additional product information, please visit [solasfires.com](http://solasfires.com)



## TWENTY6 WALL-MOUNT

### DIRECT-VENT GAS FIREPLACE

The SÓLAS TWENTY6 is a modern wall-mount, direct-vent gas fireplace. This popular size features easy installation plus all of the conveniences of a gas fireplace. Virtually endless installation possibilities, it's almost as easy as hanging a picture on the wall. The TWENTY6 is a modern gas fireplace that offers a spectacular flame picture, enhanced by the reflective porcelain enamel firebox liner.

The SÓLAS TWENTY6 has an optional Corner Mounting Kit available, allowing the unit to be mounted directly into a corner, saving space.

### Options for the TWENTY6

- > **Six Surround Finishes** (see page 16)
- > **SÓLAS Self-Calibrating Power Vent System**  
See page 28 for more information
- > **Birch Log Set & Colored Glass** (see page 31)

### Features

- Unique, SÓLAS Wall-Mount Design
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Clear/Black Reflective Glass Media
- Optional Birch Log Set
- Optional Corner Installation Kit



### Specifications

BTU Rate Range (NG) .....	19,000 - 11,000/hr
BTU Rate Range (LP) .....	19,000 - 11,000/hr
Glass Viewing Area.....	26" (660mm) W x 14½" (368mm) H
Dimensions .....	38¾" (984mm) W x 27¼" (692mm) H x 7⅝" (194mm) D
Maximum Observed Steady State Efficiency .....	78.8% / 79.5%
Remote Control .....	SÓLAS One-Touch Thermostatic Remote
Venting .....	4" x 6⅝" Direct-Vent, up to 20' (6.10m) Vertical and 10' (3.05m) Horizontal

For additional product information, please visit [solasfires.com](http://solasfires.com)

Certified by PFS-TECO, to ANSI Z21.88-2014/CSA 2.33-2014 Vented Gas Fireplace Heaters and CAN/CGA-2.17-M91, Gas-Fired Appliances for Use at High Altitudes and CSA P.4.1-09





ONE6 SHOWN WITH PURE WHITE SURROUND & BIRCH LOG SET

## ONE6 WALL-MOUNT

### DIRECT-VENT GAS FIREPLACE

The SÓLAS ONE6 brings contemporary styling in a smaller, portrait format. Perfect for bathrooms, bedrooms and anywhere you would like extra ambiance and warmth. The versatile ONE6 is heater-rated and offers a beautiful flame picture, enhanced by the reflective porcelain enamel firebox liner. A perfect solution for Tiny Homes and “off-the-grid” living. This unit will run a full fireplace season on only (4) AA batteries!

The SÓLAS ONE6 has an optional Corner Mounting Kit available which helps save more space and delivers a unique focal point.

### Options for the ONE6

- > **Six Surround Finishes** (see page 16)
- > **SÓLAS Self-Calibrating Power Vent System**  
See page 28 for more information
- > **Birch Log Set & Colored Glass** (see page 31)

### Features

- Unique, SÓLAS Wall-Mount Design
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Ease of Installation
- Direct-Vent Technology, Heater Rated
- Battery-Operation (lasting up to one fireplace season)
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Reflective Porcelain Enamel Liner
- Integrated Modern Mesh Safety Screen
- 6 Interchangeable Surround Finishes
- Clear / Black Reflective Glass Media
- Optional Birch Log Set (shown in above image)
- Optional Corner Installation Kit



### Specifications

BTU Rate Range (NG) .....	13,500 - 7,500/hr
BTU Rate Range (LP) .....	13,500 - 7,500/hr
Glass Viewing Area.....	16" (406mm) W x 18" (457mm) H
Dimensions .....	23½" (597mm) W x 30" (762mm) H x 7⅝" (194mm) D
Maximum Observed Steady State Efficiency .....	79.0% / 77.8%
Remote Control .....	SÓLAS One-Touch Thermostatic Remote
Venting .....	4" x 6⅝" Direct-Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal

For additional product information, please visit [solasfires.com](http://solasfires.com)

TWENTY6 FI

INSERT

The SÓLAS TWENTY6 FI is a versatile and stylish fireplace insert. It has a clean modern look and brings high-efficiency to an inefficient fireplace. With a depth of only 14.25", it is one of the slimmest inserts in the industry, enabling it to fit in the smallest of spaces.



TWENTY6 FI SHOWN WITH SATIN BLACK & STAINLESS STEEL COMBINATION, SYMMETRICAL SURROUND

TWENTY6 FI Surround Options



Satin Black



Satin Black & Stainless Steel Combination



Satin Black & Steel Grey Combination



Steel Grey & Stainless Steel Combination (with Optional Birch Log Set)

Surround Sizes

Standard Surround.....	38" (965mm) W x 26" (660mm) H
Optional Sizes .....	40" (1016mm) W x 29" (737mm) H
	44" (1118mm) W x 32" (813mm) H
Symmetrical Size .....	40" (1016mm) W x 25" (635mm) H

+ Custom Surround Sizing available





## TWENTY6 FI

### DIRECT-VENT GAS FIREPLACE INSERT

The SÓLAS TWENTY6 FI is a uniquely contemporary fireplace insert that offers consumers the option of upgrading their existing wood-burning fireplace to a high-efficiency, direct-vent gas heater. Minimalist design lets the beauty of the flame speak for itself, with the view of the fire being enhanced by the high-quality, reflective porcelain enamel firebox liner.

The SÓLAS TWENTY6 FI is compact in size, with a depth of only 14.25", it is one of the slimmest inserts in the industry, enabling it to fit in the smallest of fireplaces. It comes standard with a variable speed comfort blower and the SÓLAS One-Touch, programmable thermostatic remote control.

### Options for the TWENTY6 FI

- > **Four Surround Finishes** (see previous page)
- > **Custom Surround Sizing Available**
- > **Birch Log Set & Colored Glass** (see page 31)

### Features

- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Reflective Porcelain Enamel Liner
- Direct-Vent Technology, Heater Rated
- Electronic Pilot Ignition with 5-Day No Demand Timeout
- Variable Speed Comfort Blower - Remote Control Operated
- 4 Interchangeable Surround Finishes
- Integrated Modern-Mesh Safety Screen
- Battery Backup
- Clear / Black Reflective Glass Media
- Optional Birch Log Set (shown in above image)



### Specifications

BTU Rate Range (NG) .....	19,500 - 14,000/hr
BTU Rate Range (LP) .....	19,500 - 16,000/hr
Glass Viewing Area .....	26" (660mm) W x 10½" (267mm) H
Dimensions .....	29¾" (756mm) W x 20¾" (527mm) H x 14¼" (362mm) D
Maximum Observed Steady State Efficiency .....	79.0% / 80.0%
Variable Speed Blower .....	Standard
Remote Control .....	SÓLAS One-Touch Thermostatic Remote
Venting .....	3" x 3" Co-Linear Direct-Vent, 36' (11m) Maximum

ONE6 FS

# FREESTANDING

A timeless, classic design with modern functionality. Whether you're looking to heat a remote cabin or deliver extra coziness to an urban apartment – the SÓLAS ONE6 Freestanding Stove fits any interior.



ONE6 FS SHOWN IN SATIN BLACK, REAR VENT

## ONE6 FS Finish Options



Satin Black



Satin Black with Steel Grey Front (shown with Optional Birch Log Set)



Steel Grey





**ONE6 FS** SHOWN WITH SATIN BLACK & STEEL GREY FRONT, TOP VENT

## ONE6 FS

### FREESTANDING DIRECT-VENT GAS STOVE

The SÓLAS ONE6 FS is a contemporary freestanding, direct-vent gas stove that fits both traditional and modern decor. Minimalist design lets the beauty of the flame speak for itself, with the view of the fire being enhanced by the reflective porcelain enamel firebox liner. A perfect solution for Tiny Homes and “off-the-grid” living. The ONE6 FS will run a full fireplace season on only (4) AA batteries!

The SÓLAS ONE6 FS can be set up for top, rear or down venting with the optional SÓLAS Self-Calibrating Power Vent Technology. A SÓLAS One-Touch remote control is supplied and allows for manual operation or can be programmed to maintain your room temperature at a set comfort level.

### Options for the ONE6 FS

- > **Three Finishes** (see previous page)
- > **SÓLAS Self-Calibrating Power Vent System**  
See page 28 for more information
- > **Birch Log Set & Colored Glass** (see page 31)

### Features

- High-Efficiency, Direct-Vent Gas Stove
- **NEW** SÓLAS One-Touch Thermostatic Remote Control
- Direct-Vent Technology, Heater Rated
- Three Finish Options
- Reflective Porcelain Firebox Liner
- Battery-Operation (lasting up to one fireplace season)
- Integrated Modern-Mesh Safety Screen
- Top or Rear Vent Option
- Clear / Black Reflective Glass Media
- Optional Birch Log Set
- Optional Down Venting with Self-Calibrating Power Vent
- Optional Variable Speed Comfort Blower

**NEW**

**SÓLAS  
One-Touch  
Remote**



### Specifications

BTU Rate Range (NG) .....	13,500 - 7,500/hr
BTU Rate Range (LP) .....	13,500 - 7,500/hr
Glass Viewing Area .....	16" (406mm) W x 18" (457mm) H
Dimensions .....	23 <sup>1</sup> / <sub>8</sub> " (587mm) W x 18 <sup>7</sup> / <sub>8</sub> " (479mm) D x 40 <sup>3</sup> / <sub>4</sub> " (1035mm) H
Maximum Observed Steady State Efficiency .....	79.0% / 77.8%
Remote Control .....	Standard
Venting .....	4" x 6 <sup>5</sup> / <sub>8</sub> " Direct-Vent, Top or Rear Vent, up to 20' (6.10m) Vertical & 10' (3.05m) Horizontal

For additional product information, please visit [solasfires.com](http://solasfires.com)



WALL-MOUNT

# OUTDOOR

Transform your outdoor space with ease with a SÓLAS Outdoor gas fireplace. Available in three sizes, and built with high-grade stainless steel, the SÓLAS outdoor wall-mount fireplace allows for an easy installation.



FORTY6 OUTDOOR





## FORTY6 OUTDOOR

### LINEAR WALL-MOUNT GAS FIREPLACE

With its signature modern linear design, the FORTY6 adds a contemporary focal point to your outdoor space.

Bold and classically designed, homeowners marvel at the FORTY6 Outdoor fireplace's clean lines and state-of-the-art wall-mount design. Manufactured in the USA with high-grade 304 stainless steel, inside and out, constructed to withstand the elements! The reflective porcelain enamel firebox liners provide flame depth and radiant heat.

#### Optional Cover

SÓLAS Outdoor Fireplaces are designed to withstand the elements of outdoor environments. Our optional covers offer extra protection when your fireplace is not in use. Each cover is proportionately designed to fit SÓLAS Outdoor models. *Color: Black, Material: Ultratexhyde.*

#### Features

- Wall-Mount Design, Simply Hang on any Outdoor Vertical Surface
- **High-Grade 304 Stainless Steel** to Withstand the Elements
- Remote Control
- Reflective Porcelain Enamel Liners
- Automatic Pilot Ignition
- Clear Glass Media
- Integrated Modern Mesh Safety Screen
- Battery-Operation (lasting up to one fireplace season)
- Designed & Built in the USA

#### Specifications

BTU Rate Range .....	31,500 - 22,400/hr NG 31,900 - 21,100/hr LP
Viewing Area .....	46" W x 12" H
Dimensions .....	58 <sup>3</sup> / <sub>8</sub> " W x 25 <sup>1</sup> / <sub>4</sub> " H x 8" D
Material .....	High-Grade 304 Stainless, Firebox & Exterior Surround

For additional product information, please visit [solasfires.com](http://solasfires.com)



## TWENTY6 OUTDOOR

### LANDSCAPE WALL-MOUNT GAS FIREPLACE

The SÓLAS TWENTY6 Outdoor fireplace is a modern wall-mount gas fireplace. It is built with 304 high-grade stainless steel inside and out to withstand the elements. The TWENTY6 Outdoor features easy installation plus all of the conveniences of a modern gas fireplace. Virtually endless installation possibilities, it's almost as easy as hanging a picture on the wall.

The reflective porcelain enamel firebox liners provide flame depth and radiant heat. Optional stainless steel corner mounting kit is available.

#### Optional Cover

SÓLAS Outdoor Fireplaces are designed to withstand the elements of outdoor environments. Our optional covers offer extra protection when your fireplace is not in use. Each cover is proportionately designed to fit SÓLAS Outdoor models.

*Color: Black, Material: Ultratexhyde.*

#### Features

- Wall-Mount Design, Simply Hang on any Outdoor Vertical Surface
- **High-Grade 304 Stainless Steel** to Withstand the Elements
- Remote Control
- Reflective Porcelain Enamel Liners
- Automatic Pilot Ignition
- Clear Glass Media
- Integrated Modern Mesh Safety Screen
- Battery-Operation (lasting up to one fireplace season)
- Built in the USA with High-Grade Stainless Steel

#### Specifications

BTU Rate Range .....	21,500 - 14,900/hr NG 21,300 - 13,300/hr LP
Viewing Area .....	26" W x 14½" H
Dimensions .....	38¾" W x 27¼" H x 7⅝" D
Material .....	High-Grade 304 Stainless, Firebox & Exterior Surround

For additional product information, please visit [solasfires.com](http://solasfires.com)





ONE6 OUTDOOR

# ONE6 OUTDOOR

## PORTRAIT WALL-MOUNT GAS FIREPLACE

The SÓLAS ONE6 Outdoor is our portrait-sized wall-mount gas fireplace. It is designed and built with 304 high-grade stainless steel inside and out to withstand the elements. The size makes it perfect for smaller settings – it can simply hang on any vertical surface. The ONE6 Outdoor can also be installed in a corner with our optional stainless steel corner mounting kit, creating a unique focal point and saving space. For added warmth and ambiance—the ONE6 Outdoor will easily extend your outdoor time!

### Optional Cover

SÓLAS Outdoor Fireplaces are designed to withstand the elements of outdoor environments. Our optional covers offer extra protection when your fireplace is not in use. Each cover is proportionately designed to fit SÓLAS Outdoor models. *Color: Black, Material: Ultratexhyde.*

### Features

- Wall-Mount Design, Simply Hang on any Outdoor Vertical Surface
- **High-Grade 304 Stainless Steel** to Withstand the Elements
- Remote Control
- Reflective Porcelain Enamel Liners
- Automatic Pilot Ignition
- Clear Glass Media
- Integrated Modern Mesh Safety Screen
- Battery-Operation (lasting up to one fireplace season)
- Built in the USA


### Specifications

BTU Rate Range	12,150 - 7,500/hr NG 12,600 - 7,600/hr LP
Viewing Area	16" W x 18" H
Dimensions	23½" W x 30" H x 7⅞" D
Material	High-Grade 304 Stainless, Firebox & Exterior Surround

For additional product information, please visit [solasfires.com](http://solasfires.com)

Certified by PFS-TECO, to ANSI Z21.97-2014/CSA 2.41-2014 "Outdoor Decorative Gas Appliances", CGA 2.17-M91(R2009) "Gas Fired Appliances for Use at High Altitudes"

# SÓLAS SELF-CALIBRATING POWER VENT SYSTEM

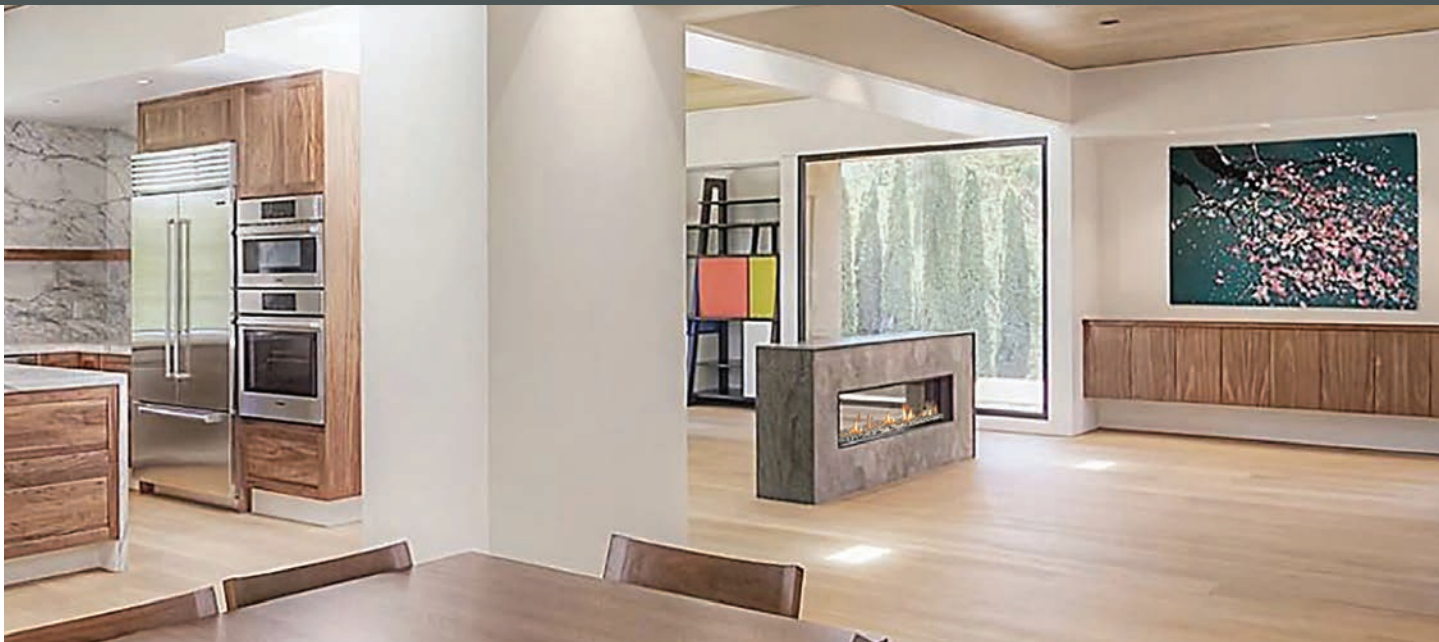

The **SÓLAS Self-Calibrating System** offers maximum design flexibility in any room with vent runs of up to 130 feet possible. Venting can be run vertically, horizontally, and with the ability to vent downward up to 6 feet.

The **SÓLAS** difference is in our proprietary **Self-Calibrating Technology**. With the push of a button, the Self-Calibrating control automatically adjusts and sets the appropriate air restriction settings required for the vent run. Every vent configuration is unique, and this feature eliminates the need for the installer to manually select the “appropriate” air restrictor setting.


## Power Vent System Features

- Self-Calibrating
- Run up to 130 feet of pipe
- Utilize up to 8, 90 degree elbows
- Vent down up to 6 feet

## Terminations available:

- Sleek Flush Mount
- Surface Mount
- Vertical Mount

The Self-Calibrating Power Vent System is compatible with all SÓLAS Wall-Mount, Free-Standing, Slim-Line and Built-In Direct-Vent models.

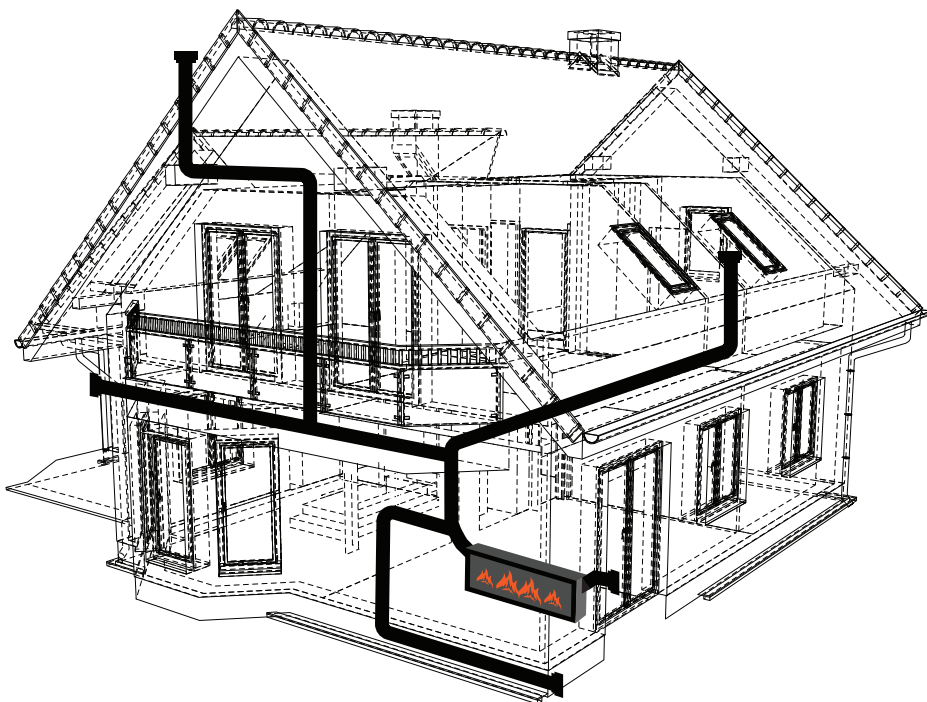



# SÓLAS COOL ZONE TECHNOLOGY




**SÓLAS Cool Zone Technology** efficiently manages the surface temperatures on surrounding walls, eliminating limitations on the design elements your architect or designer can specify.

The Cool Zone Technology is designed to redirect heat buildup from within the fireplace enclosure back into the room, minimizing the heat loss typically seen with noisy fan-based cooling technologies. Redirecting this heat from within the walls allows for virtually endless design possibilities without fear of heat damage or design obstacles.

**SÓLAS Cool Zone Technology enables the installation of design features above the fireplace, and safeguards against wall heat damage, such as:**

- Negative effects on TVs, electrical components and fine art
- Cracking marble and sensitive material
- Peeling or discoloring of paint
- Melting of glue adhesives used in tiling
- Deforming or warping of surrounding walls

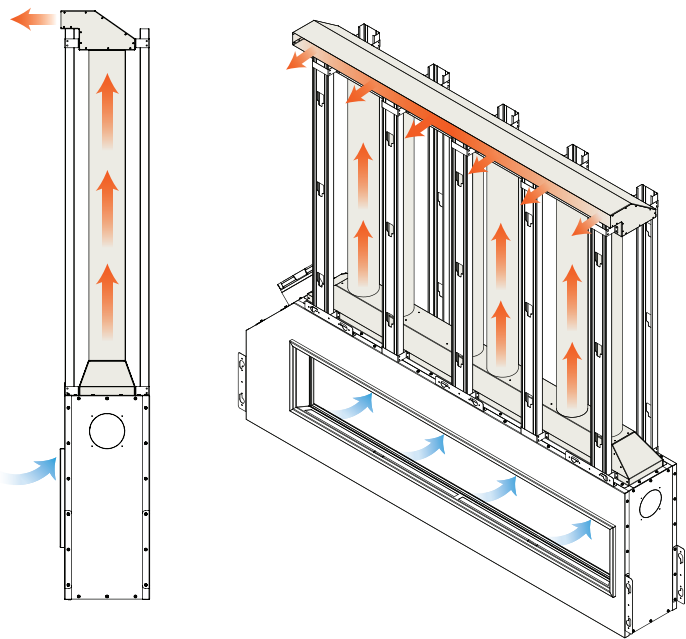

COOL ZONE TECHNOLOGY WALL TEMPERATURE DIFFERENCE

CLEARANCE ABOVE FIREBOX	INDUSTRY STANDARD	SÓLAS COOL ZONE TECHNOLOGY
0 - 6.0"	280° F - 380° F (138° C - 193° C)	120° F (49° C)
6.0" - 12.0"	240° F - 320° F (116° C - 160° C)	100° F (38° C)
12"	180° F - 300° F (82° C - 149° C)	80° F (27° C)

The Cool Zone Technology is compatible with all SÓLAS Slim-Line Built-In and THIRTY8 Built-In Fireplaces. Please refer to the installation manual for complete specifications and installation requirements.

THIRTY8 BUILT-IN WITH SLATE STONE FIREBOX  
& MAPLE LOG SET





# MEDIA OPTIONS

**Please Note:** All Direct-Vent models come standard with Clear / Black Reflective glass media. Optional Birch Log Set available (below). Model THIRTY8 with glass media burner comes standard with Aureo Reflective media on the burner and Black Reflective media on the media tray. Optional Maple Log Set available (below). All Outdoor units come standard with Clear glass media.

## Glass Media



Aureo Reflective



Cerulean



Cyprium



La Mer




Sapphire Reflective



Clear



Clear/Black Reflective

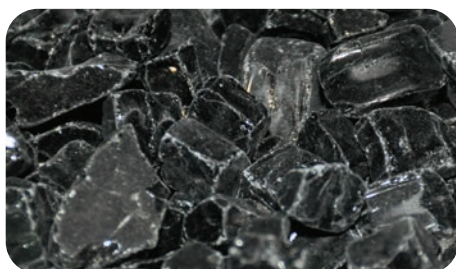

Black Reflective

## Log Sets



**Birch Log Set Kit**  
For Direct-Vent Wall-Mount,  
Fireplace Insert, Freestanding Stove  
and all Slim-Line Built-In models



**Maple Log Set Kit**  
For THIRTY8 Model with Log Set Burner



# SÓLAS

CONTEMPORARY FIRE

SÓLAS is family-owned and operated. Patrick and Mary Moynihan, founders, together with their son David, head of Engineering and R&D, bring a unique perspective to the marketplace. Since first introducing the SÓLAS product line to the North American market in 2007, the Moynihans' hard work and passion for innovation have delivered much light and warmth into customers' homes and will continue to for many years to come.



SÓLAS Photo Gallery

PROUDLY DESIGNED  
& BUILT IN THE

USA



SÓLAS Video Gallery

*A Division of Progressive Manufacturing Inc.*

452 SUNAPEE STREET, NEWPORT, NH 03773  
(603) 298-5169

[solasfires.com](http://solasfires.com)